### Pedestrian & Site Lighting Collection



LED technology


powered by Nichia® & Cree®





### Available in 4 sizes







# Bold, streamlined architectural lighting collection with high-performance LED technology powered by Nichia® and Cree®.

With its stunning profile for pedestrian and site lighting, the 780/790 collection offers multiple size options to create a seamless transition from parking lots to walkways and facades. The 780/790 collection is manufactured from durable, high-quality cast and spun aluminum. The collection is available in both two and four struts with post arms and wall mounts in two styles and coordinating bollards in three body styles.

Adding to the bold styling, energy-efficient, high-performance lighting is achieved with multiple LED offerings:

46w/78w/117w high performance LED platforms | 16w/24w/37w cost effective LED modules | 2700K, 3000K, 3500K, 4000K & 5000K (CCT may vary by light engine.)

Complementing style, performance, and meeting the demands of lighting control ordinances and specifications is made simpler with industry standard Triac, 0-10v, DMX and DALI dimming options.





### $LA780 \mid LA790 \; Series \; \text{Post and wall mount available in four sizes with 2-or 4-struts}$

#### **Build A Product**

bulla A FIOC	iuct
LUMINAIRES	
LA78	2-strut
LA79	4-strut
SIZE	
0	18" H x 11-3/4 <b>"</b> W
1	23" H x 16" W
2	27-1/4" H x 18-3/4" W
3	30" H x 20-1/2" W
ORIENTATIO	NC
1	Post
WATTAGE	
M016LD	16-watt Cree® LED module (Size 0 and 1 only)
M024LD	24-watt Cree LED module (Size 1, 2 and 3 only)
M037LD	37-watt Cree LED module (Size 1, 2 and 3 only)
P046LD4	46-watt platform (Size 1, 2 and 3 only)
P078LD4	78-watt platform (Size 2 and 3 only)
P117LD4	117-watt platform (Size 3 only)
DIMMING	
D	Dimming (0-10v)
N	No Dimming
OPTICS	
T2	Type II
Т3	Type III
T5	Type V (M016, M024, M037 are T5 only)
COLOR TEN	MPERATURE (CCT)
27K	2700K
30K	3000K (M016, M024, M037 only)
35K	3500K
40K	4000K
50K	5000K (P046, P078, P117 only)
ACCESSOF	RIES
PC	Photo cell
TLPC	Twist lock photo cell
FINISH	
	Visit anplighting.com/products/




LA7801 2-strut, 16w module, post mount size 0




LA7901 4-strut, 16w module, post mount size 0

(21w) B1-U1-G0










(46w, T3) B1-U2-G1 (46w, T5) B3-U2-G1









#### Product Number Sample

LUMINAIRE	SIZE	ORIENTATION	WATTAGE	DIMMING	OPTICS	COLOR TEMP	ACCESSORY	FINISH
LA 78	2	1	PO78LD4	N	T5	40K	PC	13











## Available in 2 styles





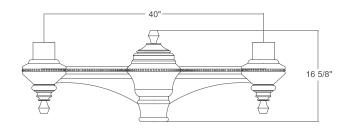


PA7421-2

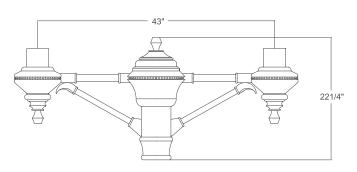



### Available in 2 styles



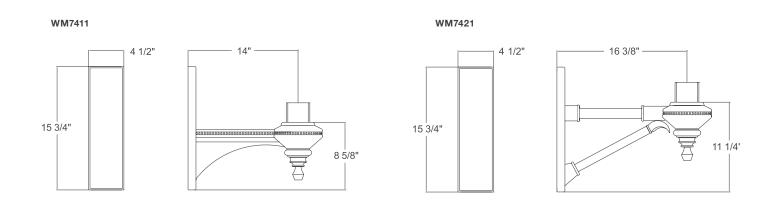





### Available in 3 body styles





2-strut, 16w Cree module




4-strut, 16w Cree module





### BL780 | BL790 Series


#### Build A Product


BOLLARDS	
BL7801	2-strut
BL7802	2-strut
BL7803	2-strut
BL7901	4-strut
BL7902	4-strut
BL7903	4-strut
LENS	
NL	No Lens
WATTAGE	
M010LD	10-watt Cree LED module
M016LD	16-watt Cree LED module
DIMMING	
D	Dimming 10-watt is triac (120v only) 16-watt is 0-10v
N	No Dimming
OPTICS	
T5	Type V
COLOR TEN	MPERATURE (CCT)
27K	2700K
30K	3000K
35K	3500K
40K	4000K
ACCESSOR	RIES
IBOLT	Eye Bolt
FINISH	
	Visit anplighting.com/products/color-finishes

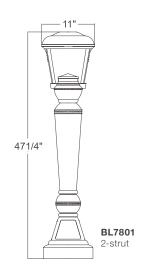


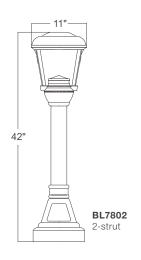

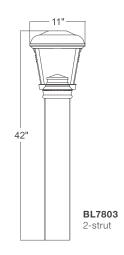

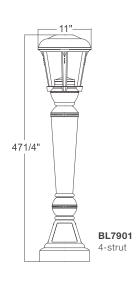

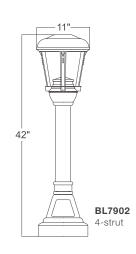




#### Product Number Sample

TEMP // COLUMN / COLU	BL7801	NL	M016LD	N	T5	40K		41
BOLLARD LENS WATTAGE DIMMING OPTICS COLOR ACCESSORY FIN	BOLLARD	LENS	WATTAGE	DIMMING	OPTICS	COLOR TEMP	ACCESSORY	FINISH






#### **PHOTOMETRICS**






BL7901-M016LD-N-W-T5 Light loss factor - 0.90 Fixture lumens - 962 Mounting height - 3.5 ft.




LA791-P046LD4-T5-40K

Light loss factor - 0.90 Fixture lumens - 3859 Mounting height - 16.0 ft. B3-U2--G1



LA792-P078LD4-T5-40K

Light loss factor - 0.90 Fixture lumens - 6390 Mounting height - 20.0 ft. B3-U1-G1



LA793-P117LD4-T5-40K Light loss factor - 0.90 Fixture lumens - 9957 Mounting height - 30.0 ft. B4-U2-G2

#### MLO & BUG Rating Guide

The Model Lighting Ordinance (MLO) is a guide for environmentally responsible outdoor lighting in North America and is the result of extensive efforts by the International Dark Sky Association (IDA) and the Illuminating Engineering Society of North America (IESNA).

For a BUG Rating Quick Reference Guide, visit www.ANPLighting.com and click the Resource tab.

Since 1985, ANP Lighting has been skillfully integrating design aesthetics, engineering excellence, and advancing technology to manufacture the industry's only all-LED line of decorative architectural lighting and warehouse-inspired RLM fixtures. With our privately owned foundry and spinning facilities and in-house engineering department, we can quickly and cost-effectively modify any product to deliver an affordable custom modification solution. We empower architects, engineers, and specifiers to meet the growing demand for energy conservation, sustainability, and environmental design inspiration.

We design and manufacture the largest selection of LED decorative architectural lighting available today, including luminaires, bases, poles, and bollards, and are recognized as the #1 manufacturer of RLM fixtures and mountings in the industry.



Contact Us: 800-548-3227 | 909-982-1807 **ANP**Lighting.com

9044 Del Mar Avenue, Montclair, CA 91763

