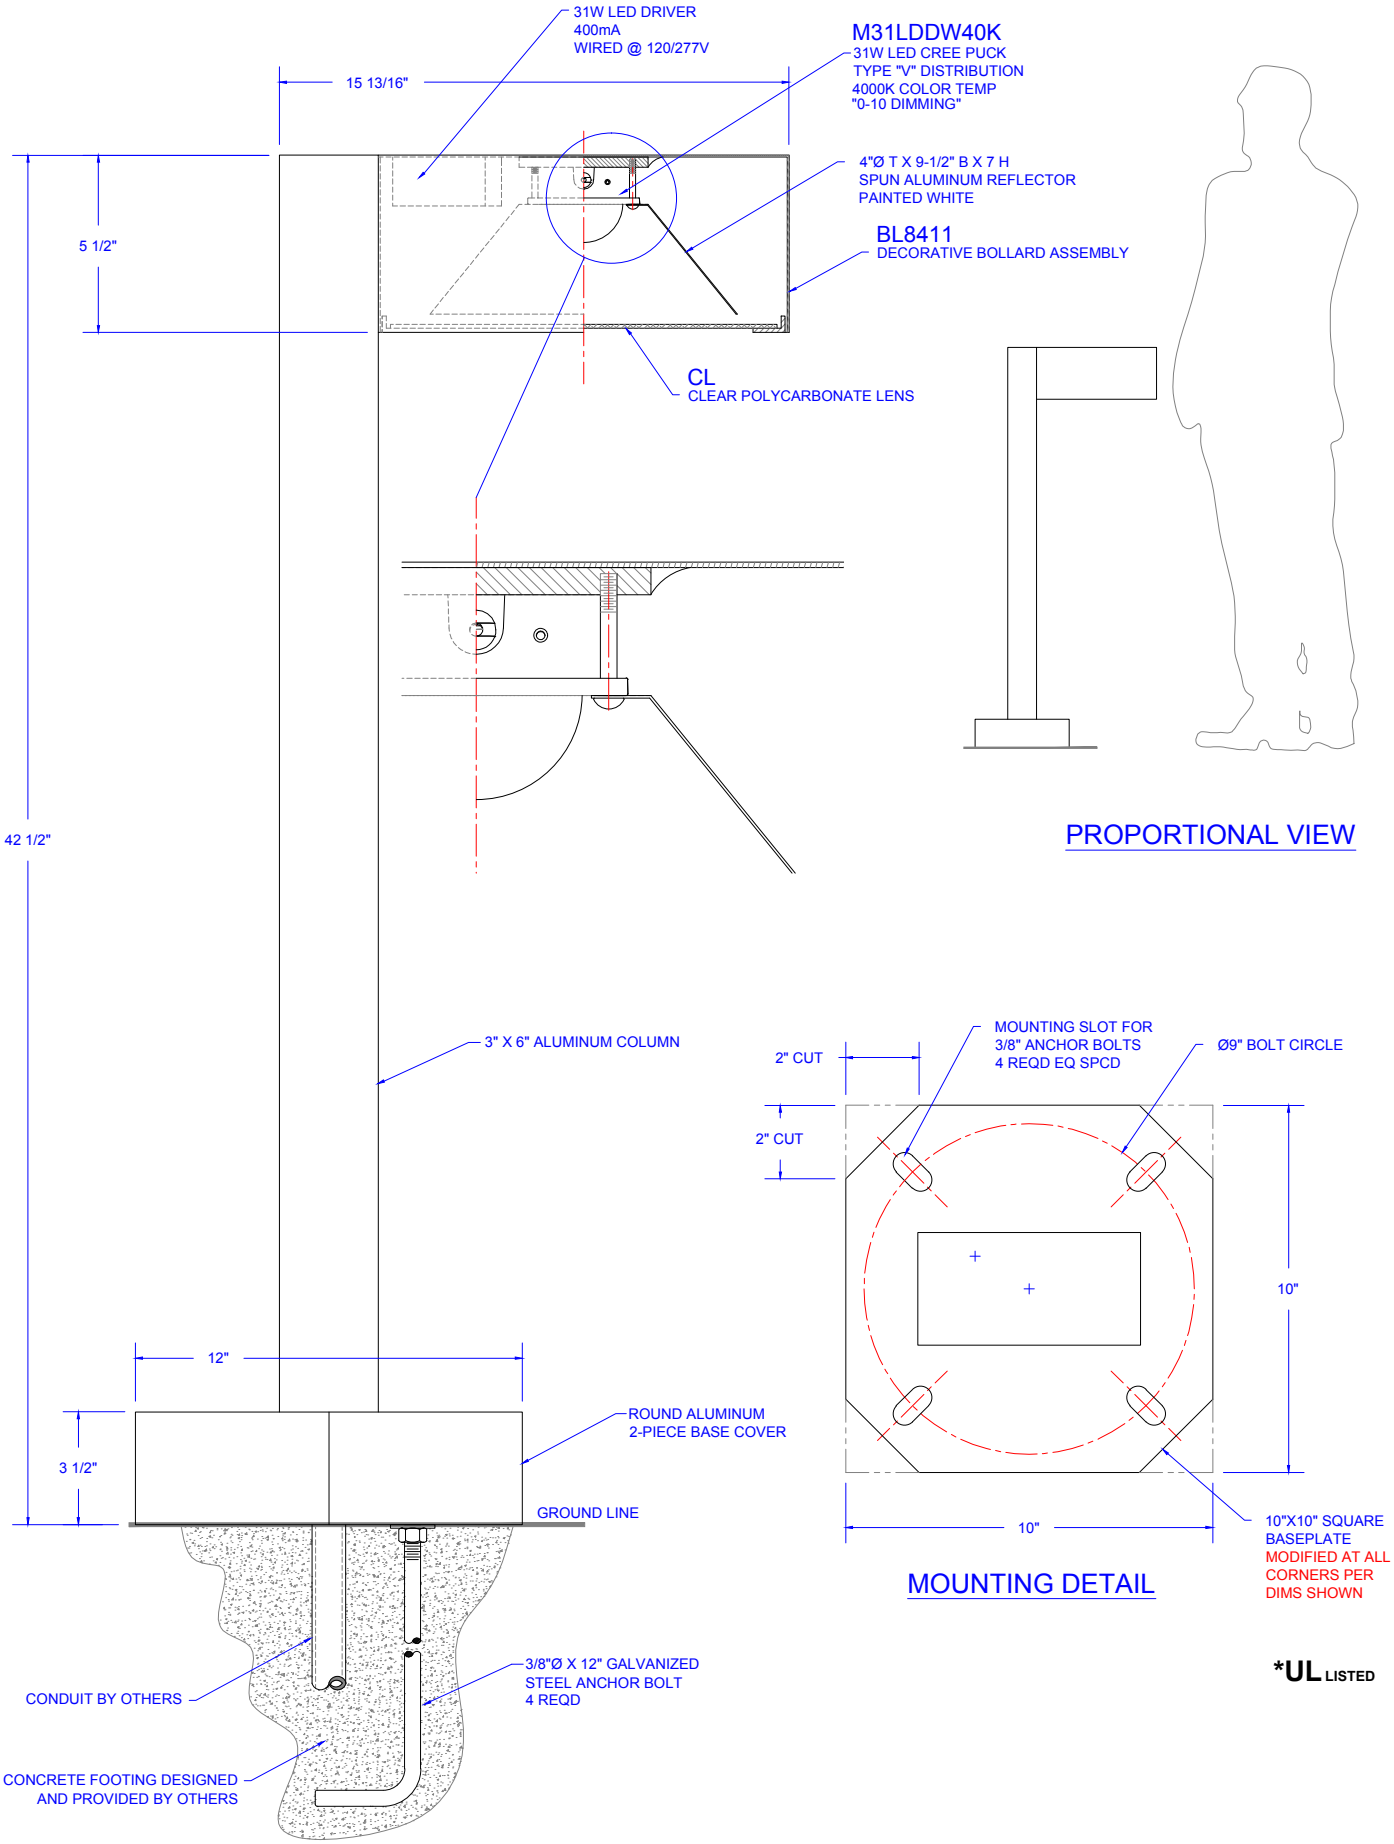
31W LED DRIVER
400mA
WIRED @ 120/277V
M31LDDW40K
31W LED CREE PUCK
TYPE "V" DISTRIBUTION
4000K COLOR TEMP
"0-10 DIMMING"
15 13/16"
4"Ø T X 9-1/2" B X 7 H
SPUN ALUMINUM REFLECTOR
PAINTED WHITE
5 1/2"
BL8411
DECORATIVE BOLLARD ASSEMBLY
CL
CLEAR POLYCARBONATE LENS
PROPORTIONAL VIEW
42 1/2"
3" X 6" ALUMINUM COLUMN
MOUNTING SLOT FOR
3/8" ANCHOR BOLTS
4 REQD EQ SPCD
Ø9" BOLT CIRCLE
2" CUT
2" CUT
10"
10"
12"
ROUND ALUMINUM
2-PIECE BASE COVER
3 1/2"
GROUND LINE
10"X10" SQUARE
BASEPLATE
MODIFIED AT ALL
CORNERS PER
DIMS SHOWN
MOUNTING DETAIL
CONDUIT BY OTHERS
3/8"Ø X 12" GALVANIZED
STEEL ANCHOR BOLT
4 REQD
CONCRETE FOOTING DESIGNED
AND PROVIDED BY OTHERS
*UL LISTED