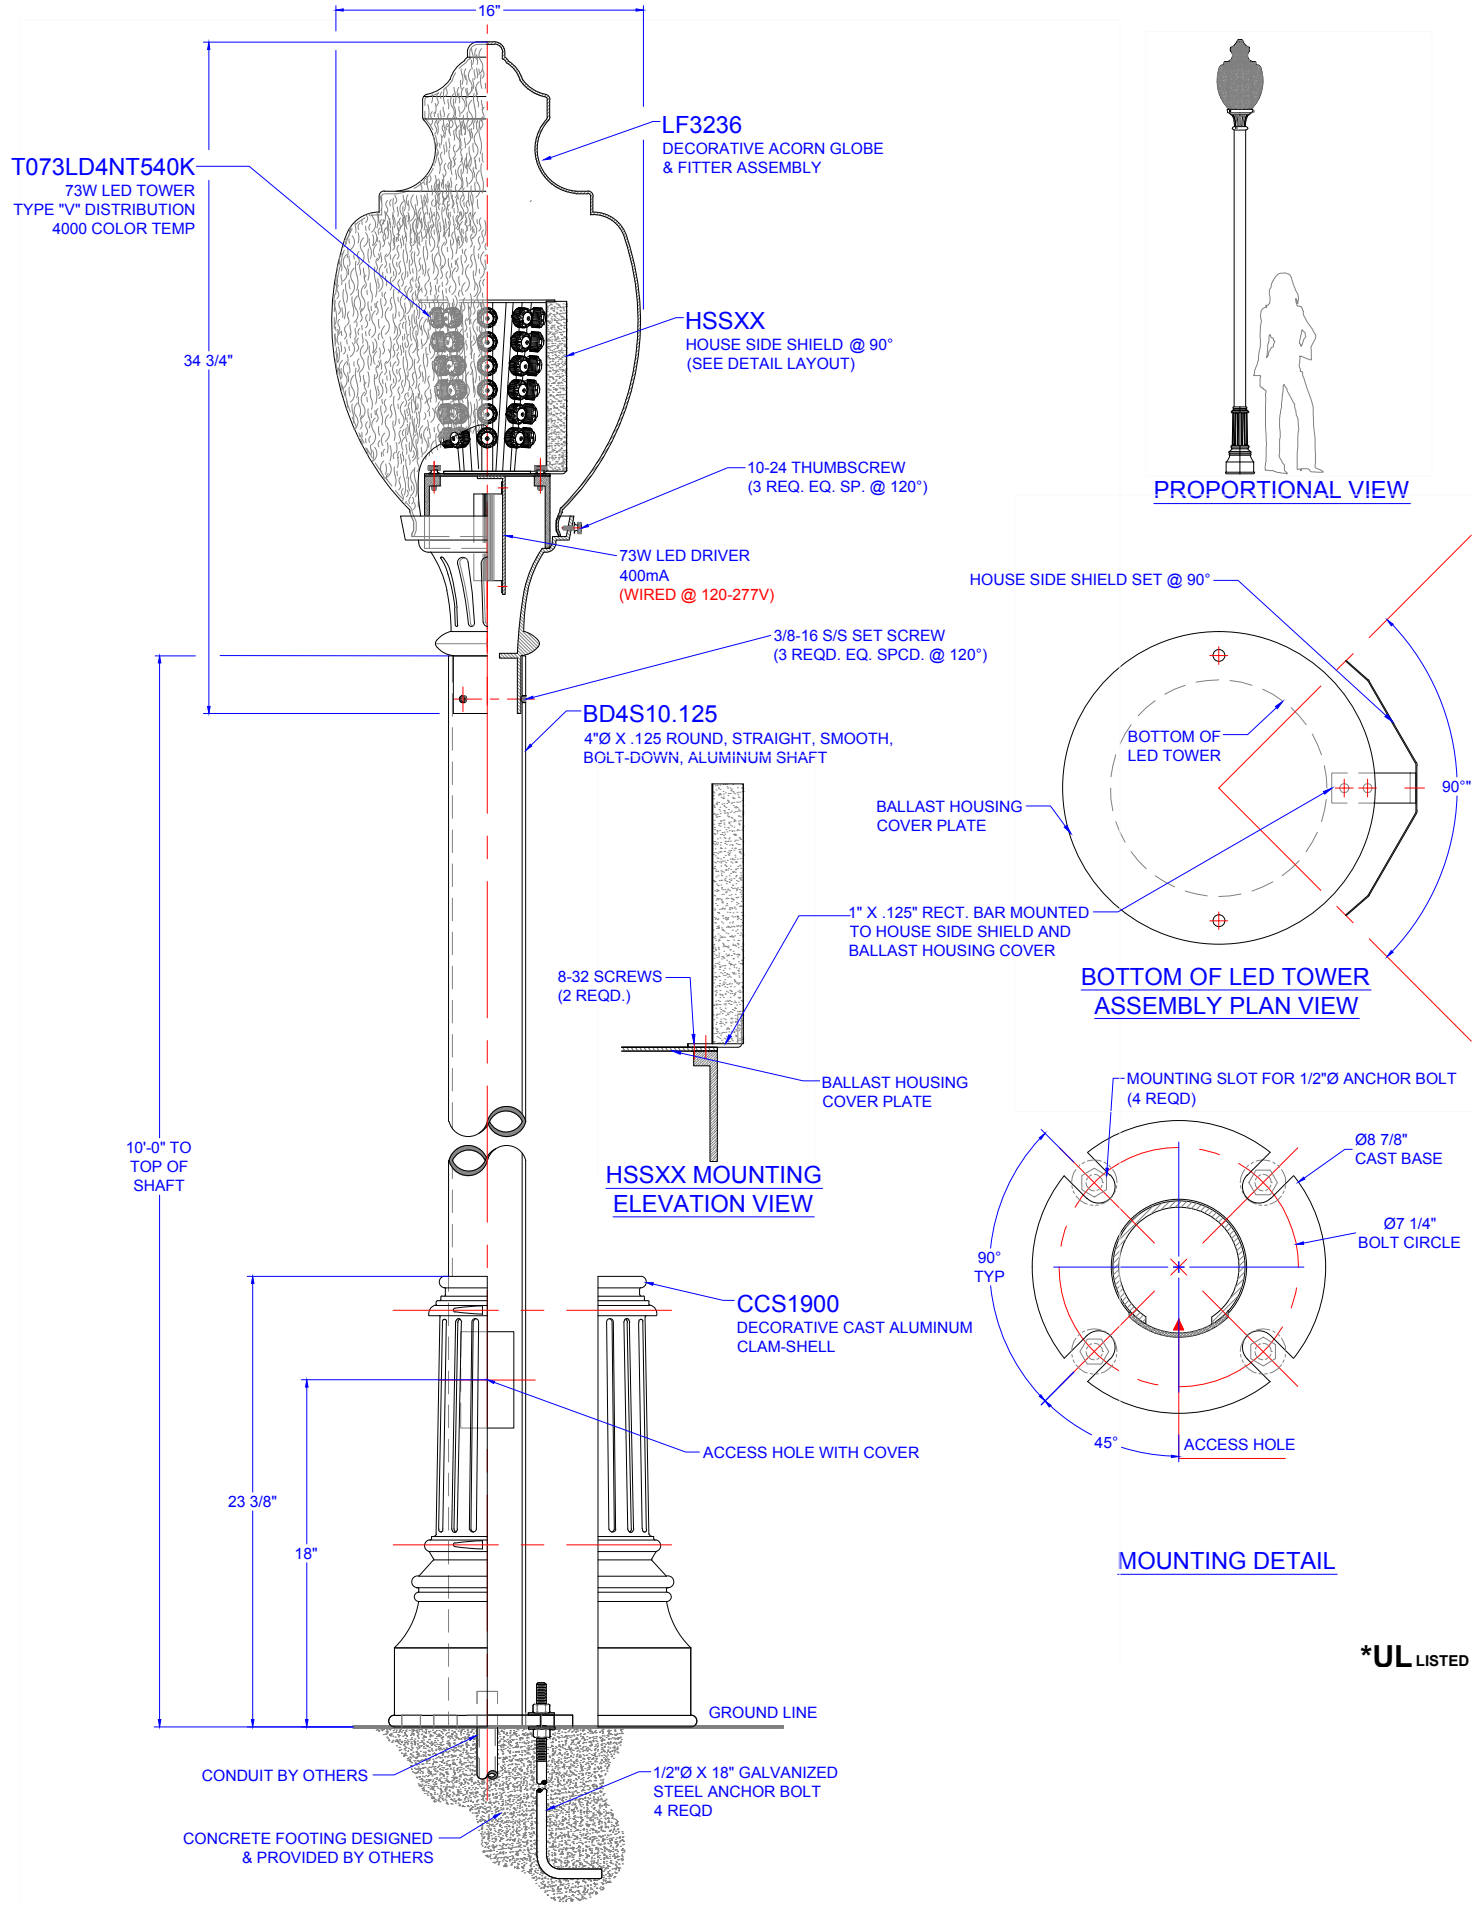
16"
LF3236
DECORATIVE ACORN GLOBE
& FITTER ASSEMBLY
T073LD4NT540K
73W LED TOWER
TYPE "V" DISTRIBUTION
4000 COLOR TEMP
34 3/4"
HSSXX
HOUSE SIDE SHIELD @ 90°
(SEE DETAIL LAYOUT)
10-24 THUMBSCREW
(3 REQ. EQ. SP. @ 120°)
73W LED DRIVER
400mA
(WIRED @ 120-277V)
3/8-16 S/S SET SCREW
(3 REQD. EQ. SPCD. @ 120°)
BD4S10.125
4"Ø X .125 ROUND, STRAIGHT, SMOOTH,
BOLT-DOWN, ALUMINUM SHAFT
10'-0" TO
TOP OF
SHAFT
CCS1900
DECORATIVE CAST ALUMINUM
CLAM-SHELL
ACCESS HOLE WITH COVER
23 3/8"
18"
GROUND LINE
CONDUIT BY OTHERS
1/2"Ø X 18" GALVANIZED
STEEL ANCHOR BOLT
4 REQD
CONCRETE FOOTING DESIGNED
& PROVIDED BY OTHERS
PROPORTIONAL VIEW
HOUSE SIDE SHIELD SET @ 90°
BOTTOM OF
LED TOWER
BALLAST HOUSING
COVER PLATE
90°
1" X .125" RECT. BAR MOUNTED
TO HOUSE SIDE SHIELD AND
BALLAST HOUSING COVER
BOTTOM OF LED TOWER
ASSEMBLY PLAN VIEW
8-32 SCREWS
(2 REQD.)
BALLAST HOUSING
COVER PLATE
HSSXX MOUNTING
ELEVATION VIEW
MOUNTING SLOT FOR 1/2"Ø ANCHOR BOLT
(4 REQD)
Ø8 7/8"
CAST BASE
Ø7 1/4"
BOLT CIRCLE
90°
TYP
45°
ACCESS HOLE
MOUNTING DETAIL

*UL LISTED