

MOUNTING DETAIL

Various heights and •xture con•gurations may require a di• erent bolt circle. Consult factory for speci•c bolt circle required.

Material

Aluminum pole bases and base plates shall be cast from 356 aluminum alloy. Shafts shall be extruded 6061-T6 aluminum. Available in 3", 4", 5" or 6" diameter. Wall thickness 0.125" or 0.188".

Mounting

Four anchor bolts provided are 3/4"x18". Anchor bolts, nuts and washers are hot dipped galvanized steel. Spun aluminum bolt cover provided.

Access

All poles are provided with a hand access opening and cover. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request).

Grounding

All poles are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate ½-20 stainless steel machine screw.

Pole Height

Maximum pole height is 25-feet.


Accessories

Banner arms, ladder rests, signage, flag pole holder and GFI receptacles are optional.

Finish

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity, and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

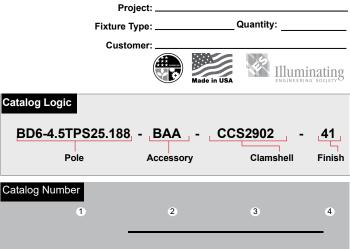

See page 2 for more ordering

1 Item Number	OD	Height	Wall	80 MPH	100 MPH
BD4-3TPS10	3.00"	10'	.125	10.40	6.10
BD4-3TPS12	3.00"	12'	.125	7.90	4.30
BD4-3TPS14	3.00"	14'	.125	5.80	2.70
BD5-3TPS16	3.00"	16'	.125	4.60	2.10
BD5-3TPS18	3.00"	18'	.125	2.90	1.30
BD6-4.5TPS20	4.50"	20'	.188	11.90	7.10
BD6-4.5TPS25	4.50"	25'	.188	6.90	3.80

Project:		
Fixture Type:	Quantity:	
Customer:		

1	ACCESSORIES
GFI15	(15 amp GFCI receptacle outlet)
GFI20	(20 amp GFCI receptacle outlet)
GFI-WPU	(20 amp GFCI receptacle with weather proof in-use cover)
BAA	(Cast Banner Arm A for 24" wide banner)
BAB	(Cast Banner Arm B for 30" wide banner)
BAC	(Cast Banner Arm C for 30" wide banner)
LR1	(Cast Ladder Rest 1)
LR3	(Cast Ladder Rest 3)
LR4	(Cast Ladder Rest 4)
LR5	(Cast Ladder Rest 5)
SIGN A	(Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang)
SIGN B	(Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang)
SIGN C	(Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each line, requires Banner Arm to hang)
SIGN D	(Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line)
SIGN E	(Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/ numbers on one line)
FPH1	(Flag Pole Holder)
TP	(Tamper Proof Screws)
BDC	(Spun Aluminum Bolt cover)
SBDC	(Split Bolt Cover)

3	2-PIECE CLA	MSHELLS
	A	
CCS0300	CCS1302	CCS2902
CCS0509	CCS1501	CCS2903
CCS0701	CCS1502	CCS5301
CCS0702	CCS1504	CCS5401
CCS0900	CCS1509	CCS5509
CCS1100	CCS1607	CCS6303
CCS1201	CCS1608	CCS6502
CCS1301	CCS1902	CCS9103

4 *Premium and	l Marine		ISHES Finish have additio	nal char	ges
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Architectural Bronze	51	51M
Cantaloupe	11	11M	Patina Verde	52	52M
Lilac	12	12M	Copper Clay	53	53M
Putty	13	13M	Silver	56	56M
Raw Unfinished	40	NA	Black Verde	61	61M
Black	41	41M	Painted Chrome	70	70M
Forest Green	42	42M	Painted Copper	71	71M
Bright Red	43	43M	Textured Black	72	72M
White	44	44M	Matte Black	73	73M
Bright Blue	45	45M	Textured Architectural Bronze	tural 76	
Sunny Yellow	46	46M	Textured White	77	77M
Aqua Green	47	47M	Textured Silver	78	78M
Galvanized	49	NA	PREMIUM FINISH Preminum Grade*		Marine Grade*
Navy	50	50M	Carbon Graphite	96	96M
			Wood Grain	99	NA