
Direct Burial Round Aluminum Fluted Poles

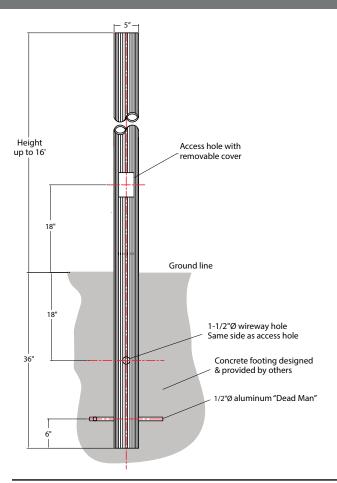

Material

Shafts shall be extruded 6061-T6 aluminum. Available in 3", 4" or 5" diameter. Wall thickness 0.125" or 0.188" or 0.250.

Mounting

Concrete footing designed and provided by others. A 1/2"Ø aluminum "Dead Man" is provided.

Access

All poles are provided with a hand access opening and cover. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). 1-1/2"Ø wireway hole provided on same side as access hole.

Grounding

All poles are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate ¼-20 stainless steel machine screw.

Pole Height

Maximum pole height is 16-feet.

Accessories

Banner arms, ladder rests, signage, flag pole holder and GFI receptacles are optional.

Finish

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity, and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

110)	ect:				
Fixture Ty	vpe:	Quantity:			
Custon	ner:				
	Made in 1		ninating BRING SOCIETY		
Catalog Logic					
DB3F10.125	- BAA -	CCS1902 -	41		
DB3F10.125 Pole	- BAA -	CCS1902 - Clamshell	41 Finish		
			<u> </u>		
Pole			<u> </u>		
Pole Catalog Number	Accessory	Clamshell	Finish		

See page 2 for more ordering

1 Item Number	OD	Height	Wall	80 MPH	100 MPH
DB3F6125	3.00"	6'	.125	6.90	4.00
DB3F7125	3.00"	7'	.125	6.00	3.60
DB3F8125	3.00"	8'	.125	5.20	3.00
DB3F9125	3.00"	9'	.125	4.50	2.60
DB3F10125	3.00"	10'	.125	3.90	2.00
DB4F8188	4.00"	8'	.188	23.60	15.00
DB4F9188	4.00"	9'	.188	20.00	12.60
DB4F10188	4.00"	10'	.188	16.80	10.30
DB4F11188	4.00"	11'	.188	14.60	8.80
DB4F12188	4.00"	12'	.188	12.50	7.30
DB4F13188	4.00"	13'	.188	10.00	5.80
DB4F14188	4.00"	14'	.188	9.10	4.50
DB5F10188	5.00"	10'	.188	23.50	18.20
DB5F11188	5.00"	11'	.188	21.00	16.40
DB5F12188	5.00"	12'	.188	18.60	14.60
DB5F13188	5.00"	13'	.188	16.70	13.00
DB5F14188	5.00"	14'	.188	14.80	11.40
DB5F15188	5.00"	15'	.188	13.30	10.40
DB5F16188	5.00"	16'	.188	11.80	9.00

Direct Burial Round Aluminum Fluted Poles

Project: ____

Customer: _____

Fixture Type: _____ Quantity: _____

_		
2	ACCESSORIES	i
GFI15	(15 amp GFCI receptacle outlet)	
GFI20	(20 amp GFCI receptacle outlet)	F
GFI-WPU	(20 amp GFCI receptacle with weather proof in-use cover)	*
BAA	(Cast Banner Arm A for 24" wide banner)	000
BAB	(Cast Banner Arm B for 30" wide banner)	(\$)
BAC	(Cast Banner Arm C for 30" wide banner)	
LR1	(Cast Ladder Rest 1)	
LR3	(Cast Ladder Rest 3)	
LR4	(Cast Ladder Rest 4)	•cani
LR5	(Cast Ladder Rest 5)	
SIGN A	(Cast Sign A; 30" x 9", 8 letters/numbers on on requires Banner Arm to hang)	e line; (I) (I) (I) (I) (I) (I) (I) (I) (I) (I)
SIGN B	(Cast Sign B; 31" x 7", 12 letters/numbers on requires Banner Arm to hang)	one line; (1) (1) (1) (1) (1) (1) (1) (1)
SIGN C	(Cast Sign C; 27" x 11", two rows of 8 letters/ on each line, requires Banner Arm to hang)	Numbers
SIGN D	(Cast Sign D; 11" x 6 1/2", 4 letters/numbers	on one line)
SIGN E	(Cast Sign E; comes with pole clamp, 24 1/2' numbers on one line)	x 6", 9 letters/
FPH1	(Flag Pole Holder)	<i>/</i>
TP	(Tamper Proof Screws)	
SBDC	(Split Bolt Cover)	

3	2-PIECE CLA	MSHELLS
CCS0300	CCS1302	CCS2902
CCS0509	CCS1501	📥 CCS2903 🚊
CCS0701	CCS1502	CCS5301
CCS0702	CCS1504	CCS5401
CCS0900	CCS1509	CCS5509
CCS1100	CCS1607	CCS6303
CCS1201	凸 ccs1608	
CCS1301	CCS1902	CCS9103 🪈

4 *Premium an	d Marine		SHES Finish have additio	nal char	ges
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marin Grade
Aspen Green	10	10M	Architectural Bronze	51	51N
Cantaloupe	11	11M	Patina Verde	52	52N
Lilac	12	12M	Copper Clay	53	53N
Putty	13	13M	Silver	56	56N
Raw Unfinished	40	NA	Black Verde	61	61N
Black	41	41M	Painted Chrome	70	701
Forest Green	42	42M	Painted Copper	71	71N
Bright Red	43	43M	Textured Black	72	721
White	44	44M	Matte Black	73	73N
Bright Blue	45	45M	Textured Architectural Bronze	76	76N
Sunny Yellow	46	46M	Textured White	77	771
Aqua Green	47	47M	Textured Silver	78	78N
Galvanized	49	NA	PREMIUM FINISH	Preminum Grade*	Marin Grade
Navy	50	50M	Carbon Graphite	96	96N
			Wood Grain	99	NA