



**Quick Ship**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

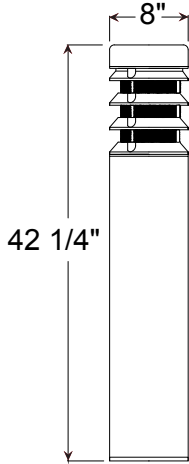

**Specifications**

**Material:**  
All parts are durable, high strength aluminum extrusion and spinings. All mounting hardware shall be stainless steel or zinc plated steel.

**Lens:**  
Clear acrylic lens.

**Mounting:**  
Standard anchor bolts are 3/8" x 12" x 3". Bolts, nuts and washers shall be hot dipped galvanized steel. Bolt pattern diameter is 6".

**Drivers:**  
Universal voltage 120-277 is standard. 0-10V dimming is standard for LED towers. 0-10V, TRIAC and ELV dimming to 1% protocols are standard for LED modules.

See page 2 table for LED engine and driver specs, voltage and dimming protocols.

**Finish:**  
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Modifications:**  
Consult factory for custom or modified designs.

**Q-BL6061  
LED**

Weight: 24.5 lbs  
BUG: B1-U3-G1

**Catalog Logic**



**Catalog Number**



1 LENS	
CL	(Clear Acrylic, Module Only)
FR	(Frosted Acrylic)

2 LIGHT SOURCE & WATTAGES	
M010LD	(10w, 1250 lumen, Cree Module)
M016LD	(16w, 2000 lumen, Cree Module)
M024LD	(24w, 3000 lumen, Cree Module)
T042LD4	(42w Tower; 400ma Driver)

3 DIMMING	
D	(Dimming)

See page 2 table for LED engine and driver specs, voltage and dimming protocols

4 OPTICS	
Tower	Module
T5 (Type V)	W (T5 Wide Distribution with Dome LED Lens)
	N (T5 Narrow Distribution with Flat LED Lens)

5 COLOR TEMPERATURE (CCT)	
Tower	Module
40K (4000K)	27K (2700K)
	30K (3000K)
	35K (3500K)
	40K (4000K)

6 VOLTAGE	
UNV	(120-277)

7 FINISHES			
Standard Grade	Marine Grade		Standard Grade
40	NA	Raw Unfinished	53
41	101	Black	56
42	102	Forest Green	61
43	114	Bright Red	70
44	107	White	71
45	112	Bright Blue	72
46	123	Sunny Yellow	73
47	120	Aqua Green	76
49	NA	Galvanized	77
50	111	Navy	78
51	103	Architectural Bronze	10
52	104	Patina Verde	11
12	133	Lilac	13
109		Silver	109
106		Black Verde	106
118		Painted Chrome	118
105		Painted Copper	105
108		Textured Black	108
125		Matte Black	125
121		Textured Architectural Bronze	121
127		Textured White	127
124		Textured Silver	124
130		Aspen Green	130
131		Cantaloupe	131
132		Putty	132

Consult factory for additional paint charges and availability

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**LED PERFORMANCE**

MODULE				
LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy
10W	2700K	1250	12W	125
	3000K	1250	12W	125
	3500K	1250	12W	125
	4000K	1250	12W	125
16W	2700K	2000	19W	125
	3000K	2000	19W	125
	3500K	2000	19W	125
	4000K	2000	19W	125
24W	2700K	3000	28W	125
	3000K	3000	28W	125
	3500K	3000	28W	125
	4000K	3000	28W	125

TOWER				
LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy
42W	4000K	4905	45w	109

**MODULE SPECIFICATION**

- Efficacy 65-125 lumens per watt
- Life: L70 50,000 hours
- Color temp: 2700K,3000K,3500K and 4000K
- CRI: >90

**MODULE DRIVER SPECIFICATION**

- Input Voltage: 120-277 Volts; 50/60Hz
- Dimmable down to 1%
- 0-10V, TRIAC and ELV dimming protocols are standard.
- Output Current: Constant Current: 440mA to 940mA (model dependent)
- Driver Efficiency > 80%; Power Factor > 0.9
- Integral Surge Protection in conformance to ANSI C62.41 Category A

**MODULE LISTINGS**

- Fully compliant with the RoHS Directive
- Certifications: CE/UL

**TOWER SPECIFICATION:**

- Efficacy ranges from 80-116 lumens per watt
- Customized lens precisely directs the light
- Operating temperature of -30C to 55C
- Life: L70 is 60,000 hours
- PLATFORM CCT: 2700K, 3000K,3500K, and 4000K
- TOWER CCT: 4000K
- CRI: >70
- Parallel circuitry ensures consistent light output in the event of single LED failure

**TOWER DRIVER SPECIFICATION:**

- Operates at 400mA
- Dimmable down to 10%
- Built in surge protection
- Constant current output 50/60HZ
- Driver Efficiency > 90% power factor above 99%
- 120 – 277 volts
- 0-10V dimming protocol is standard

**TOWER LISTINGS**

- Fully compliant with the RoHS Directive
- Certifications: ETL
- Rated IP65 with an optional IP66 rating

**WARRANTY**

See [www.ANPlighting.com](http://www.ANPlighting.com) for complete fixture warranty.

- 5 year limited warranty on Modules/Drivers
- 7 year limited warranty\* on Tower LED engines
- 5 year limited warranty\* on Tower Drivers

\*Limited Warranty: A typical year is defined as 4380 hours of operation. Failure defined as more than 10% of the total tower LED's not operating.