Project:

Fixture Type:

Customer:

Acorn Globes available in clear stipple or white stipple.

Universal voltage 120-277 is standard. 0-10V dimming is standard for LED platforms. See page 2 table for LED engine and driver specs, voltage and dimming protocols.

Fitter: Fitter is durable 356 cast aluminum. All hardware provided shall be stainless

Fixture Mounting: Post Mount: Post Cap with set screws. Fits 3" and 4" poles.

Specifications

steel or zinc plated steel. Acorn Globe:



Approximately 12" of pull wire extends from luminaire. Additional pull wire provided for post mount arms and wall mounts.

Finish:

_____ Quantity: _

Electrical:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Modifications: Consult factory for custom or modified designs.

LF3043 LED		Weight: EPA:	20 lbs 1.56		12 CL	Light Source & Wattage	ce Optic	40K - PC - CCT Accessories		WM2141 Mounting	- 72 Finish
Catalog Number	LF3043	1	2	3	4	5	6	7	8	_	9

ACCESSORIES

(90° House Side Shield, polished)

Drivers:

15 3/8"

6

HSS90

30 3/8"

1	OPTIONAL CAGES
	See Page 3 for Style/Design
11, 12, 1	3, 14, 15
21, 22, 2	23, 24, 25
31, 32, 3	33, 34, 35
41, 42, 4	13, 44, 45

2 LENS CL (Clear Stipple Polycarbonate) WH (White Stipple Polycarbonate)

3 L	IGHT SOURCE & WATTAGES
P029LD4D	(29w Platform; 400ma Driver)
P046LD4D	(46w Platform; 400ma Driver)
P078LD4D	(78w Platform; 400ma Driver)
P117LD4D	(117w Platform; 400ma Driver)

ľ	4 OPTICS
	T2 (Type II)
	T3 (Type III)
	T5 (Type V)

COLOR TEMPERATURE (CCT) 27K (2700K) 30K (3000K) 35K (3500K) 40K (4000K)

5

HSS120	(120° House Side Shield, polished)				
PHSS90	(90° House Side/Uplight Shield, polished)				
PHSS120	(120° House Side/Uplight Shield, polished)				
*EMG-LED20I	HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)				
HLMSPC-06	(High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height)				
HLMSPC-10	(High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height)				
PC	(Button Photo Cell)				
RNR	(Reinforcing Neck Ring)				
SP	(Surge Protector, 10kA & 10kV)				
TLPC	(Twist Lock photo cell, includes receptacle & photo cell)				
TL5	(5-pin Twist Lock receptacle)				
TL7	(7-pin Twist Lock receptacle)				
*For Emergency lumen output data, see Resources section at <u>www.ANPlighting.com</u> .					

7	OPTIONAL FINIALS
	See Page 3 for Style/Size
FIN	102, FIN04, FIN05, FIN06, FIN10, FIN12, FIN15,
FIN	118, FIN28, FIN39, FIN41, FIN42, FIN48, FIN64,
FIN	170

8 MOUNTING SOURCE					
Post Mount Arms *See Page 4 for Style/Size			Wall Mount Arms *See Page 4 for Style/Size		
PA51	51	PA8711	WM2141	WM8581	
PA51	71	PA8831	WM2211	WM8831	
PA54	11		WM3351		
PA56	21		WM4511		
PA56	51		WM5131		
PA62	11		WM5161		
PA79	11		WM5311		
PA80	31		WM5601		
PA85	21		WM7411		
PA85	71		WM8011		
*See	Column Page 4 fe	Mount or Style/Size			
СМ	Column I	Mount			

9 *Premiur	n and Mari		IISHES e Finish have additional cl	narges	
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Mar Gra
Aspen Green	10	10M	Architectural Bronze	51	51
Cantaloupe	11	11M	Patina Verde	52	52
Lilac	12	12M	Copper Clay	53	53
Putty	13	13M	Silver	56	56
Raw Unfinished	40	NA	Black Verde	61	61
Black	41	41M	Painted Chrome	70	70
Forest Green	42	42M	Painted Copper	71	71
Bright Red	43	43M	Textured Black	72	72
White	44	44M	Matte Black	73	73
Bright Blue	45	45M	Textured Architectural Bronze	76	76
Sunny Yellow	46	46M	Textured White	77	77
Aqua Green	47	47M	Textured Silver	78	78
Galvanized	49	NA	PREMIUM FINISH	Preminum Grade*	Ma Gra
Navy	50	50M	Carbon Graphite	96	96

05312021

Project:

Fixture Type: _____ Customer: _____

_____ Quantity: ___

LED PERFORMANCE

PLATFORM							
LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy			
	2700K	2670	30w	89			
	3000K	2670	30w	89			
29W	3500K	3209	30w	107			
	4000K	3465	30w	116			
	2700K	4004	46w	87			
	3000K	4004	46w	87			
46W	3500K	4814	46w	105			
	4000K	5197	46w	115			
	2700K	7041	80w	88			
	3000K	7041	80w	88			
78W	3500K	8464	80w	106			
	4000K	9138	80w	114			
	2700K	10561	120w	88			
	3000K	10561	120w	88			
117W	3500K	12696	120w	106			
	4000K	13707	120w	114			

PLATFORM SPECIFICATION:

- Efficacy ranges from 87-116 lumens per watt
- Customized lens precisely directs the light
- Operating temperature of -30C to 55C
- Life: L70 is 60,000 hours
- PLATFORM CCT: 2700K, 3000K, 3500K, and 4000K
- CRI: >70
- Parallel circuitry ensures consistent light output in the event of single LED failure

PLATFORM DRIVER SPECIFICATION:

- Operates at 400mA
- Dimmable down to 10%
- Built in surge protection
- Constant current output 50/60HZ
- Driver Efficiency > 90% power factor above 99%
- 120 277 volts
- 0-10V dimming protocol is standard

PLATFORM LISTINGS

- · Fully compliant with the RoHS Directive
- Certifications: ETL
- Rated IP65 with an optional IP66 rating

WARRANTY

See www.ANPlighting.com for complete fixture warranty.

7 year limited warranty* on Platform LED engines

• 5 year limited warranty* on Platform Drivers

*Limited Warranty: A typical year is defined as 4380 hours of operation. Failure defined as more than 10% of the total platform LED's not operating





HSS90 & HSS120





TL5 & TL7



EMG-LED 20HV



HLMSPC-06 & HLMSPC-10




РС





RNR

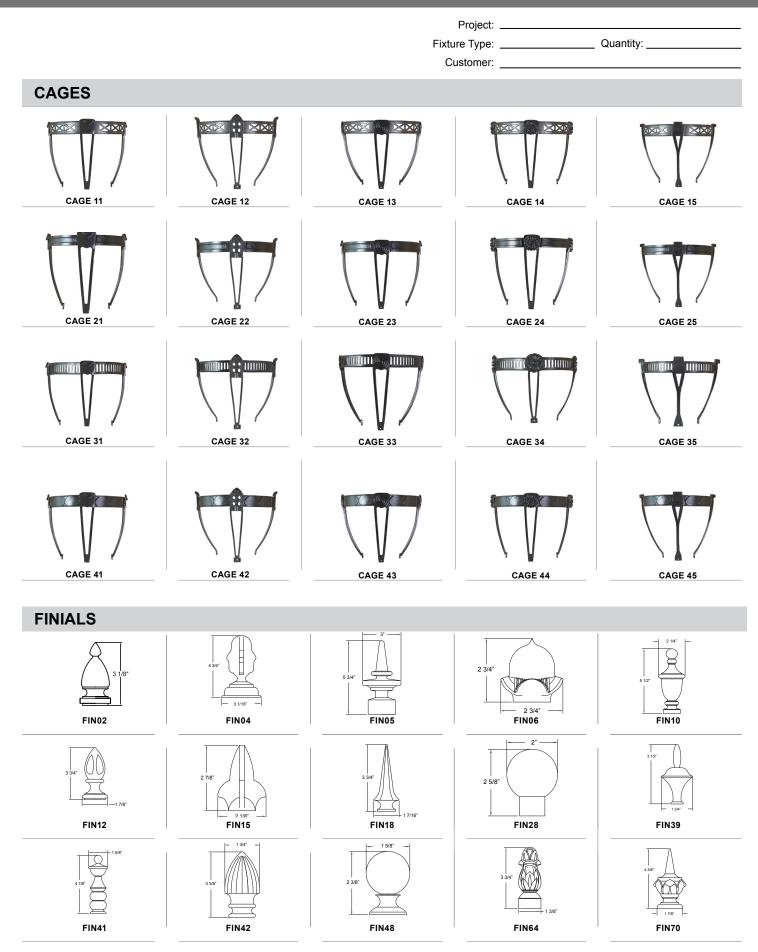

© 2021 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.


1-800-548-3227

ANPlighting.com

Project:

Customer:

Fixture Type: _____ Quantity: _____

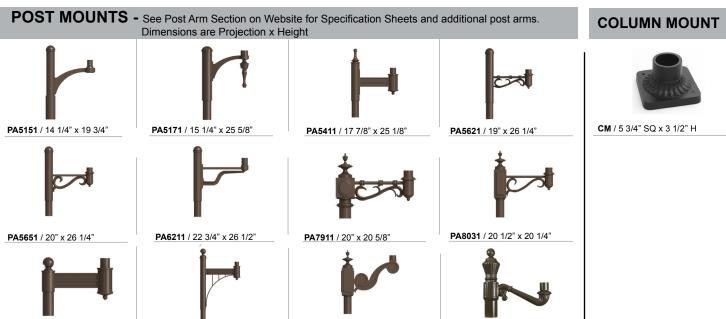


PA8711 / 20" x 20 3/8"

PA8521 / 18 1/4" x 14 1/2"

PA8571 / 24" x 47"

WALL MOUNTS - See Wall Mount Section on Website for Specification Sheets and additional wall mount arms. Dimensions are Projection x Height.



WM2141 /18" x 12 3/16"



WM5311 / 10 7/8" x 9 3/4"



WM5601 / 17 7/8" x 14"



WM3351 / 14 1/2" x 22"




x 22" WM4511 / 17" x 8"



WM8011 / 18 1/4" x 16 3/8" WM8581 / 17 1/8" x 17 1/2"

PA8831 / 18 7/8" x 18 7/8"





WM8831 / 17 1/4" x 16 3/8"

