

VTP100GL

CFL

Specifications VTP100GL-CL-32WPL-RTC-BLC-GUP

		Project:	
		Fixture Type:	Quantity:
		Customer:	
		Specifications	Made in USA UL MILLING SOCIETY S
1	<i>← 1 1/1</i> "→	Material:	Finish:



9 1/4"

Weight: 2 lbs

3

All hardware provided shall be stainless steel. Screw hardware may not match paint.

Choice of clear, frosted or prismatic glass. Colored glass available for extra charge.

Ballasts:

Fluorescent Ballast will be electronic.
Fluorescent sockets will be 4 pin to accept quad or triple tube lamps.

RTC - BLC -

Electrical:

4-Pin Socket; Multi-tap 120v, 208v, 240v & 277v.

A polyester power coat high quality linish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss

Certifications:
Cord mounts are UL Listed for dry locations.
Arm, wall, post, pendant and stem mounts are UL Listed for wet locations.

- NA - 120v - 49

Modifications:

GUP

Consult factory for custom or modified designs.



VTP100GL - CL -32WPL -

BALLAST HOUSING Fluorescent (WPL)

Catalog Logic





,
RTC (WPL Ballast Canopy)
RTCNC (WPL Ballast Canopy/No Spun Cover)
DBH (Dimming WPL Ballast Housing)
4 MOUNTING SOURCES
Arm Mounts (Cast back plate included)
E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39
Wall Mounts
WM35
WM40
WM318
Post Mounts
PM10

		Post Mour	its	
PM10				
PM20				
		Pendant Mo	unts	
	2 Light P	endant 100w	Vapor Tights	3
21PEND6 21	PEND12	21PEND18	21PEND24	21PEND36
21PEND48 2	1PEND60	21PEND72	21PEND96	
	3 Light F	endant 100v	/ Vapor Tight	S
31PEND6 31	PEND12	31PEND18	31PEND24	31PEND36
31PEND48 3	1PEND60	31PEND72	31PEND96	
	4 Light P	endant 100w	Vapor Tights	3
41PEND6 41	PEND12	41PEND18	41PEND24	41PEND36
41PEND48 4	1PEND60	41PEND72	41PEND96	

4	MOUNTING SOURCES CONT.
	Cord Mounts
BLC	(6' black cord with 1" x 5 3/8" canopy)
WHC	(6' white cord with 1" x 5 3/8" canopy)
	Stem Mounts
3/4" (1	"OD Rigid Stems with STC Flat Canopy)
3ST6	3ST12 3ST18 3ST24 3ST36 3ST48
3ST6	3ST72 3ST96

5	GUARD	
NA	(No Guard)	
GUP	(Wire Guard)	
GUPC	(Cast Guard)	

lo Accessory)
" Angle Ring)

WARRANTY

See www.anplighting.com for complete fixture warranty.



Specifications VTP100GL-CL-32WPL-RTC-BLC-GUP

Project:	
Fixture Type:	Quantity:
Customer:	

7	ACCESSORIES	
CBC	(Cast back plate Spun Alum Cover)	
PC	(Button Photo Cell) Remote Only	
sc	(Scroll for Arms)	
SLC	(Sloped Ceiling Mount)	
SQ	(Square Back Plate)	
SWL	(Swivel)	
TBK	(Turnbuckle Kit)	

8	VOLTA	AGES	
120	208	240	277


		FINIS	SHES		
Standard Grade	Marine Grade		Standard Grade	Marine Grade	· -
40	NA	Raw Unfinished	53	100	Copper Clay
41	101	Black	56	109	Silver
42	102	Forest Green	61	106	Black Verde
43	114	Bright Red	70	118	Painted Chrome
44	107	White	71	105	Painted Copper
45	112	Bright Blue	72	108	Textured Black
46	123	Sunny Yellow	73	125	Matte Black
47	120	Aqua Green	76	121	Textured Architectural Bronze
49	NA	Galvanized	77	127	Textured White
50	111	Navy	78	124	Textured Silver
51	103	Architectural Bronze	10	130	Aspen Green
52	104	Patina Verde	11	131	Cantaloupe
12	133	Lilac	13	132	Putty
Premium Grade	Marine Grade		Premium Grade	Marine Grade	
81	129	Extreme Chrome	64	116	Candy Apple Re
80	117	Textured Desert Stone	65	122	Cobalt Blue
67	119	Butterscotch	82	128	Graystone
66	115	Caramel	69	113	Gunmetal Gray



Specifications VTP100GL-CL-32WPL-RTC-BLC-GUP

Project: _____ Quantity: _____ Customer: _____



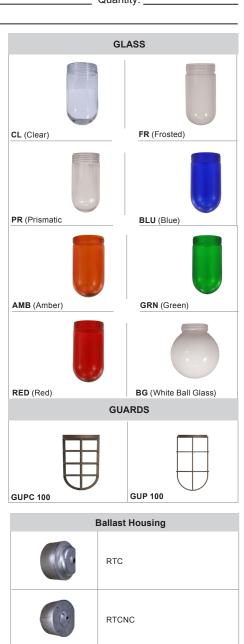

DBH