ANPLighting Spec	cifications VTP100GL-CL-32	WPL-RTC-BLC-GUPC-VTS		
	Proie	ct:		
		e: Quantity:		
	9 1/4" 9 1/4"	 Finish: A polyester powder coat high quality finis electro-statically applied and baked at 43 for exceptional durability and color retent Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. Marine grade finish provides superior sal humidity and UV protection. This coating withstands up to 3000 hours of continuou salt spray, comes with a 5-year warranty and is available in either a textured or glo surface. 20v, 208v, Certifications: Cord mounts are UL Listed for dry locatio Arm, wall, post, pendant and stem mount are UL Listed for wet locations. Modifications: 		
		Consult factory for custom or modified designs.		
VTP100GL W	leight: 2 lbs Catalog Logic			
CFL	VTP100GLCL32WPL RTC	_ BLC _ GUPC _ VTS _ NA - 120v - 49		
	Vapor Tight Style Glass Light Source/ Wattage Ballast Hous	ng Source Guard Shade Voltage Finish Accessories Accessories		
Catalog Number 1 2 VTP100GL - CL -32WPL	3 4 5 6 RTC - BLC -GUPC - VTS	7 8 9 - NA		
		A MOUNTING SOURCES CONT		
1 GLASS	3 BALLAST HOUSING	4 MOUNTING SOURCES CONT.		
NA (No Glass)	3 BALLAST HOUSING Fluorescent (WPL)	4 MOUNTING SOURCES CONT. Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy)		
NA (No Glass) CL (Clear Glass)	-	Cord Mounts		
NA (No Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass)	Fluorescent (WPL)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included)	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 Wall Mounts	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUP (Wire Guard) GUPC (Cast Guard)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 Wall Mounts WM35	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM35 WM40	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL)	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM40 WM318	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) GUPC (Cast Guard) 6 SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM318 Post Mounts	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 32WPL	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM40 WM318 Post Mounts PM10 PM20 Pendant Mounts	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 32WPL 26WPLDIM Context Contex	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM40 WM318 Post Mounts PM10 PM20 Pendant Mounts 1 1 1 1 1 1	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 2 32WPL 2 26WPLDIM 32WPLDIM (Compact Fluorescent dimming is 0-10v and ballast must be located with	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM35 WM318 Post Mounts PM10 PM20 Pendant Mounts 2 Light Pendant 100w Vapor Tights 21PEND6 21PEND12 21PEND18 21PEND24 21PEND26	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 2 32WPL 2 26WPLDIM 32WPLDIM (Compact Fluorescent dimming is 0-10v and ballast must be located with	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM35 WM318 Post Mounts PM10 PM20 Pendant Mounts 21PEND6 21PEND12 21PEND18 21PEND24 21PEND36 21PEND48 21PEND60 21PEND72 21PEND96	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 2 32WPL 2 26WPLDIM 32WPLDIM (Compact Fluorescent dimming is 0-10v and ballast must be located with	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM35 WM318 Post Mounts PM10 PM20 Pendant Mounts 2 Light Pendant 100w Vapor Tights 21PEND6 21PEND12 21PEND18 21PEND24 21PEND26	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 2 32WPL 2 26WPLDIM 32WPLDIM (Compact Fluorescent dimming is 0-10v and ballast must be located with	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM35 WM318 Post Mounts PM10 PM20 Pendant Mounts 21PEND6 21PEND12 21PEND18 21PEND24 21PEND36 21PEND48 21PEND60 21PEND72 21PEND96 3 Light Pendant 100w Vapor Tights	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		
NA (No Glass) CL (Clear Glass) FR (Frosted Glass) PR (Prismatic Glass) BLU (Blue Glass) AMB (Amber Glass) GRN (Green Glass) RED (Red Glass) BG (Ball Glass White Only) 2 LIGHT SOURCE & WATTAGES Flourescent (WPL) GU24 Socket Option 26WPL 2 32WPL 2 26WPLDIM 32WPLDIM (Compact Fluorescent dimming is 0-10v and ballast must be located with	Fluorescent (WPL) RTC (WPL Ballast Canopy) RTCNC (WPL Ballast Canopy/No Spun Cover) DBH (Dimming WPL Ballast Housing) 4 MOUNTING SOURCES Arm Mounts (Cast back plate included) E6 E9 E13 E22 E23 E24 E25 E26 E27 E36 E39 WM35 WM40 WM35 WM40 WM38 Post Mounts PM10 PM20 Pendant Mounts 21PEND6 21PEND12 21PEND18 21PEND24 21PEND36 21PEND6 21PEND12 21PEND18 21PEND24 31PEND36 31PEND6 31PEND12 31PEND18 31PEND24 31PEND24	Cord Mounts BLC (6' black cord with 1" x 5 3/8" canopy) WHC (6' white cord with 1" x 5 3/8" canopy) Stem Mounts 3/4" (1"OD Rigid Stems with STC Flat Canopy) 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 3ST60 3ST72 3ST96 5 GUARD NA (No Guard) GUPC (Cast Guard) G SHADE ACCESSORIES NA (No Accessory)		

WARRANTY

See www.anplighting.com for complete fixture warranty.

41PEND48 41PEND60 41PEND72 41PEND96

12202017



Specifications VTP100GL-CL-32WPL-RTC-BLC-GUPC-VTS

Project: ____

Customer:

Fixture Type: _____ Quantity: _____

9	9 FINISHES							
Standard Grade	Marine Grade		Standard Grade	Marine Grade				
40	NA	Raw Unfinished	53	100	Copper Clay			
41	101	Black	56	109	Silver			
42	102	Forest Green	61	106	Black Verde			
43	114	Bright Red	70	118	Painted Chrome			
44	107	White	71	105	Painted Copper			
45	112	Bright Blue	72	108	Textured Black			
46	123	Sunny Yellow	73	125	Matte Black			
47	120	Aqua Green	76	121	Textured Architectural Bronze			
49	NA	Galvanized	77	127	Textured White			
50	111	Navy	78	124	Textured Silver			
51	103	Architectural Bronze	10	130	Aspen Green Cantaloupe			
52	104	Patina Verde	11	131				
12	133	Lilac	13	132	Putty			
Premium Grade	Marine Grade		Premium Grade	Marine Grade				
81	129	Extreme Chrome	64	116	Candy Apple Red			
80	117	Textured Desert Stone	65	122	Cobalt Blue			
67	119	Butterscotch	82	128	Graystone			
66	115	Caramel	69	113	Gunmetal Gray			
68	126	Black Silver						
Consult factory for additional paint charges and availability								

7	ACCESSORIES	
СВС	(Cast back plate Spun Alum Cover)	
PC	(Button Photo Cell) Remote Only	
sc	(Scroll for Arms)	
SLC	(Sloped Ceiling Mount)	
SQ	(Square Back Plate)	
SWL	(Swivel)	
твк	(Turnbuckle Kit)	

	80	117	Stone
	67	119	Butterscotch
	66	115	Caramel
	68	126	Black Silver
	С	onsult fa	ctory for additional p
SHADE ACCESSORIES			
x VTS 100 / 8"			

8


120

VOLTAGES

240

208

Specifications VTP100GL-CL-32WPL-RTC-BLC-GUPC-VTS

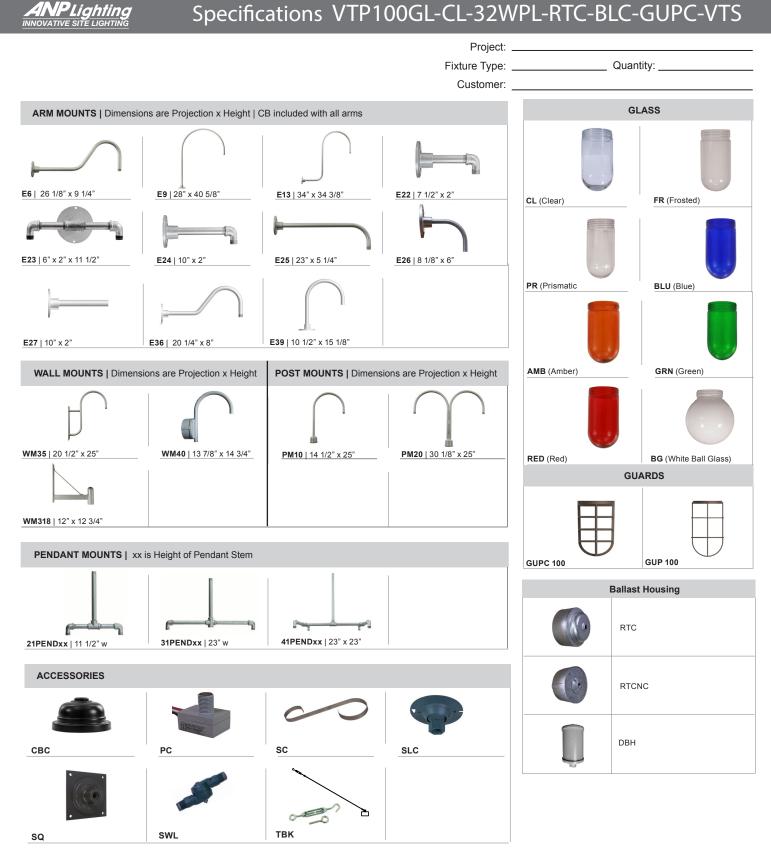

2202017