ANPLIGHTING	Specifications	VTP200G	GL-CL-42W	/PL-RTCN	C-E22-GUPC-VTS				
			Fixture Typ		Quantity:				
	10 3/4"	C A st C C C C B F F F F F 4.	Specifications aterial: onstructed of complete of l hardware provided sha eel. Screw hardware ma lass: hoice of clear, frosted or olored glass available fo allasts: luorescent Ballast will be scent sockets will be 4 p triple tube lamps. lectrical: .Pin Socket; Multi-tap 12 77v.	electronic. Fluo- pin to accept quad	With the two points         With two points         With two points           With two points         With two points         With two points         With two points           With two points         With two points         With two points         With two points         With two points           With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points         With two points				
VTP200GL CFL	VI		Source/ Ballast Housin		<b>PC - VTS - PC - 120v - 49</b> Shade Accessories Voltage Finish				
Catalog Number 1 VTP200GL - CL -4	2 3 2WPL -RTCNC -	4 5 E22 -GUP	6 C – VTS	7	89				
1 GLASS	3	BALLAST HOUS		4 MC	DUNTING SOURCES CONT.				
CL (Clear Glass)		Fluorescent (WPL	.)	BLC (6' black co	ord with 1" x 5 3/8" canopy)				
FR (Frosted Glass)	RTC (WPL Ball			WHC (6' white c	ord with 1" x 5 3/8" canopy)				
PR (Prismatic Glass) BLU (Blue Glass)	RTCNC (WPL	Ballast Canopy/No Spun	Cover)	3/4" (1"OD Rigid \$	Stem Mounts Stems with STC Flat Canopy)				
AMB (Amber Glass)	DBH (Dimming	WPL Ballast Housing)		3ST6 3ST12 3ST18 3ST24 3ST36 3ST48					
GRN (Green Glass)				3ST60 3ST72	3ST96				
RED (Red Glass)	4	MOUNTING SOUR	CES	5	GUARD				
		m Mounts (Cast back plat			Guard)				
2 LIGHT SOURCE & WATTAGE	E6 E9 E13 E2	2 E23 E24 E25 E26 E Wall Mounts	E27 E36 E39		re Guard)				
Flourescent (WPL)	WM35	waii wounts		GUPC (Cas	st Guard)				
GU24 Socket Option	WM40			6	SHADE ACCESSORIES				
26WPL	WM318				No Accessory)				
32WPL 42WPL		Post Mounts		· · · · ·	9 3/4" Angle Ring)				
26WPLDIM	PM10 PM20								
32WPLDIM	THE	Pendant Mounts							
42WPLDIM		2 Light Pendant 200w Vap	oor Tights						
(Compact Fluorescent dimming is 0-10v and ballast must I 12" of lamp)	De located within 22PEND6 22	PEND12 22PEND18 22	PEND24 22PEND36						
		PEND60 22PEND72 22							
		3 Light Pendant 200w Vap PEND12 32PEND18 32	-						
		PEND60 32PEND72 32							
		4 Light Pendant 200w Vap	oor Tights						
		PEND12 42PEND18 42							
WARRANTY	42PEND48 42	PEND60 42PEND72 42	PEND96						
See www.anplighting.com for complete fixtu	re warranty.				12202017				
					1 000 540 2007				

© 2016 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

## 1-800-548-3227 ANPlighting.com

## Specifications VTP200GL-CL-42WPL-RTCNC-E22-GUPC-VTS

Project: \_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_


Customer:

	ACCESSORIES	8 VOLTAGES				9 FINISHES						
вс	(Cast back plate Spun Alum Cover)	12	0	208	240	277						
;	(Button Photo Cell) Remote Only						Standard Grade	Marine Grade		Standard Grade	Marine Grade	
2	(Scroll for Arms)						40	NA	- Raw Unfinished	53	100	- Copper Clay
c	(Sloped Ceiling Mount)						41	101	Black	56		Silver
2	(Square Back Plate)						42	102	Forest Green	61	106	Black Verde
VL	(Swivel)						43	114	Bright Red	70	118	Painted Chrome
ĸ	(Turnbuckle Kit)						44	107	White	71	105	Painted Copper
							45	112	Bright Blue	72	108	Textured Black
							46	123	Sunny Yellow	73	125	Matte Black
							47	120	Aqua Green	76	121	Textured Architectural Bronze
							49	NA	Galvanized	77	127	Textured White
							50	111	Navy	78	124	Textured Silver
							51	103	Architectural Bronze	10	130	Aspen Green
							52	104	Patina Verde	11	131	Cantaloupe
							12	133	Lilac	13	132	Putty
							Premium Grade	Marine Grade		Premium Grade	Marine Grade	
							81	129	Extreme Chrome	64	116	Candy Apple Re
							80	117	Textured Desert Stone	65	122	Cobalt Blue
							67	119	Butterscotch	82	128	Graystone
							66	115	Caramel	69	113	Gunmetal Gray
							68	126	Black Silver			
							Co	onsult fa	ctory for additiona	l paint char	ges and	l availability
SHAD	EACCESSORIES											
	_											



ANPLighting

## Specifications VTP200GL-CL-42WPL-RTCNC-E22-GUPC-VTS

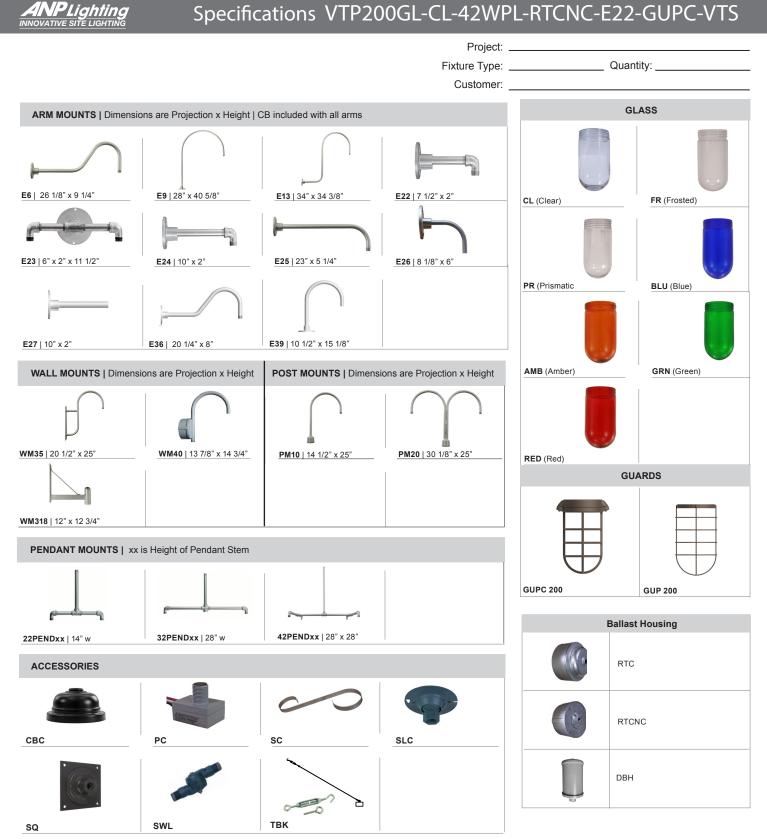

12202017