Specifications D616-BLC

Project: _ Quantity: Fixture Type: _ Customer:










Illuminating





Weight: 1.5 lbs

Material:

RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match

Specifications

Glass:

Choice of clear, frosted or prismatic glass.

Electrical:

Medium Base Socket, 200w Maximum.

Certifications: Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.

Finish:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss


Modifications:

Consult factory for custom or modified luminaires.

D616 200w max Incandescent





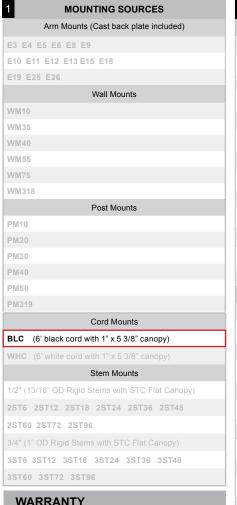

WARRANTY
$See \ www. anplighting. com for complete \ fixture \ warranty.$

2 GLASS & GUARD									
Up to 100w Options									
100GLCL									
100GLFR	(Frosted Glass)								
100GLPR	(Prismatic Glass)								
100GLCLGUP	(Clear Glass & Small Wire Guard)								
100GLFRGUP	(Frosted Glass & Small Wire Guard)								
100GLPRGUP	(Prismatic Glass & Small Wire Guard)								
100GLCLGUPC	C(Clear Glass & Cast Guard)								
100GLFRGUP	C (Frosted Glass & Cast Guard)								
100GLPRGUP	C (Prismatic Glass & Cast Guard)								
100GLGUP	(Small Wire Guard with No Glass)								
100GLGUPC	(Cast Guard with No Glass)								
AC	(Stipple Glass Acorn)								
100GLBG	(White Ball Glass)								
Up to 200w Options									
200GLCL	(Clear Glass)								
200GLFR	(Frosted Glass)								
200GLPR	(Prismatic Glass)								
200GLCLGUP	(Clear Glass & Large Wire Guard)								
200GLFRGUP	(Frosted Glass & Large Wire Guard)								
200GLPRGUP	(Prismatic Glass & Large Wire Guard)								
200GLCLGUPC (Clear Glass & Large Cast Guard)									
200GLFRGUP	C (Frosted Glass & Large Cast Guard)								
200GLPRGUP	C (Prismatic Glass & Large Cast Guard)								
200GLGUP	(Large Wire Guard with No Glass)								
200GLGUPC	(Large Cast Guard with No Glass)								

3	ACCESSORIES
CBC	(Cast back plate Spun Alum Cover)
GR16	(16" Wire Grill)
PC	(Button Photo Cell) Remote Only
sc	(Scroll for Arms)
SLC	(Sloped Ceiling Mount, 20° Max)
SQ	(Square Back Plate)
SWL	(Swivel)
TBK	(Turnbuckle Kit)

4 FINISHES								
Standard Grade	Marine Grade	_	Standard Grade	Marine Grade				
40	NA	Raw Unfinished	53	100	Copper Clay			
41	101	Black	56	109	Silver			
42	102	Forest Green	61	106	Black Verde			
43	114	Bright Red	70	118	Painted Chrome			
44	107	White	71	105	Painted Copper			
45	112	Bright Blue	72	108	Textured Black			
46	123	Sunny Yellow	73	125	Matte Black			
47	120	Aqua Green	76	121	Textured Architectural Bronze			
49	NA	Galvanized	77	127	Textured White			
50	111	Navy	78	124	Textured Silver			
51	103	Architectural Bronze	10	130	Aspen Green			
52	104	Patina Verde	11	131	Cantaloupe			
Premium Grade	Marine Grade		Premium Grade	Marine Grade				
81	129	Extreme Chrome	64	116	Candy Apple Red			
80	117	Textured Desert Stone	65	122	Cobalt Blue			
67	119	Butterscotch	82	128	Graystone			
66	115	Caramel	69	113	Gunmetal Gray			
68	126	Black Silver	83	134	Oil Rubbed Bronze			
Consult factory for additional paint charges and availability								

Specifications D616-BLC

Fixture Type: _____ Quantity: _____



