Specifications ORB216

			Proje	et:				
				Fixture Type: Quantity:				
4				er:				
			Specification	S		🕀 💹 🕕	Illun ENGINEE	ninatin
			Material: RLM shades are constru spun aluminum. Wall bac	ck plate and ballast	Finish: A polyester powder coat high quality finish is electro-statically applied and baked at 430°			
			housing are cast aluminu stainless steel. Inside of white finish for all colors paint finish. Screw hard	shade is reflective except galvanized	Products u cleansing a	onal durability and indergo an intensive and pretreatment pr paint adhesion.	e five-st	ер
		11 7/8"	paint. Glass:	n niemetie alege	humidity a	ide finish provides s nd UV protection.	This coa	ating
			Choice of clear, frosted of Electrical: Medium Base Socket, 20		salt spray,	up to 3000 hours of comes with a 5-yea ilable in either a tex	ar warra	nty
		l ← 16" ──	GU24 Socket. Approximately 12" of pul fixure. Additional pull wi	I wire extends from re provided for post	Modificati Consult fac	ons: ctory for custom or	modified	b
			mount arms and wall mo Certifications: Cord mounts are UL List Arm mount, stem mount	ed for dry locations.	designs.			
ORB216		Weight: 3.0 lbs	UL Listed for wet location	15. 216 - CL - M	в.	E6 _ CBC	. 7	2
200w Max			RLM			unting		Ē
Medium Base			Style	Soi	urce So	urce Accesso	ries Fir	nish
Catalog Number		1 2	3	•	4	5		
	ORB216		_	_		_		
1 G	LASS		OURCES Continued*	5 _{*N}		NISHES h has an additional charge		
-	0w Options		em Mounts STC Flat Canopy)	Standard Colors	Standard Grade Marin	e Premium Colors	Premium Grade	Marine Grade
CL (Clear Glass)		1/2" (13/16" OD) Rigid	, , ,	Aspen Green	10 10M		01	01M
FR (Frosted Glass) PR (Prismatic Glass)		2ST6 2ST12 2ST18 2ST24 2ST36 2ST48	3ST6 3ST12 3ST18 3ST24 3ST36 3ST48	Cantaloupe	11 11M		14 64	14M 64M
		2ST60 2ST72 2ST96	3ST60 3ST72 3ST96	Putty	12 12M		65	65M
2 LIGHT SOUR	CE & WATTAGES	*Arm mount, Wall moun fixture finish.	t or Stem finish will match	Raw Unfinished	40 NA	Caramel	66	66M
GU24 (GU24 Socket))			Black	41 41M		67	67M
MB (Medium Base	e Socket, 200w Max)	4 ACC	ESSORIES*	Forest Green Bright Red	42 42M		68 69	68M
3 MOUNTING SOURCES*			Spun Alum Cover)*	White	46 46M	-	79	NA
Arm Mounts (Cast back plate included)		GR16 (16" Wire Grill)*	Spun Alum Cover)	Bright Blue	45 45M	1 Textured Desert Stone	80	80M
E3 E4 E6 E8 E9 E10 E11 E12 E15 E18 E24 E25 E27 E36		,	II) Demote Only	Sunny Yellow	46 46M		81	81M
Wall Mounts		PC (Button Photo Ce		Aqua Green	47 47M		82	82M
WM35 WM41 WM55 WM318		SC (Scroll for Arms)*		Navy	49 NA 50 50M		83 96	96M
Post Mounts		SLC (Sloped Ceiling Mount Canopy, 20° Max)*		Architectural Bronze	51 51M	-		
PM10 PM20 PM30 PM40 PM50 PM319		SQ (Square Back PI	ate)*	Patina Verde	52 52M	1		
Cord Mounts** (Includes 1" x 5 3/8" canopy) (See page 3 for color cord style)		SWL (Adjustable Lock	ting Swivel)*	Copper Clay	53 53M			
		TBK (Turn Buckle Kit)	*	Silver	56 56M			
		*Accessory finish will r	natch fixture finish.	Black Verde Painted Chrome	61 61M			
BLC (6' Black SJT Cord)	WHC (6' White SJT Cord)			Painted Copper	70 70M			
BLSF (6' Black)	ORSF (6' Orange)			Textured Black	72 72M	1		
GYSF (6' Gray)	LGSF (6' Lime Green)			Matte Black	73 73M	1		
CHSF (6' Chocolate Brown) KGSF (6' Kelly Green)			Textured Architectural	76 76M			
WHSF (6' White)	CBSF (6' Cobalt Blue)			Textured White	77 77M			
CASF (6' Cardinal)	SBSF (6' Sky Blue)			Textured Silver	78 78M	nal paint charges and avai	ability	
BWHPF (6' Black/White	BIHPF (6' Brown/Ivory			Consult		paint onergee and dval	y.	
Houndstooth)	Houndstooth)							
GYCPF (6' Gray/Citrus Yellow)	MOSPF (6' Magenta/Orange							
NMTPF (6' Navy Mini Tweed)	Stripe)							
Glossy Fabr	ic Colored Cords							
GMGF (6' Gun Metal)	SSGF (6' Sterling Silver)							
CPGF (6' Copper Penny) GOGF (6' Gold)	BRGF (6' Bronze)							
	Mounts** x 5 3/8" canopy)							
	cable with 6' Black SJT Cord)							
,	cable with 6' White SJT Cord)	WARRANTY						
SCC-XXXX (Stainless steel Replace XXXX with	cable with 6' Color cord. th color cord designation above) See www.ANPlighting.co	m for complete fixture warranty.					
	sh will match fixture finish.							

© 2020 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

08012019


Specifications ORB216

Fixture Type:

Customer:

Project:

Quantity: _____

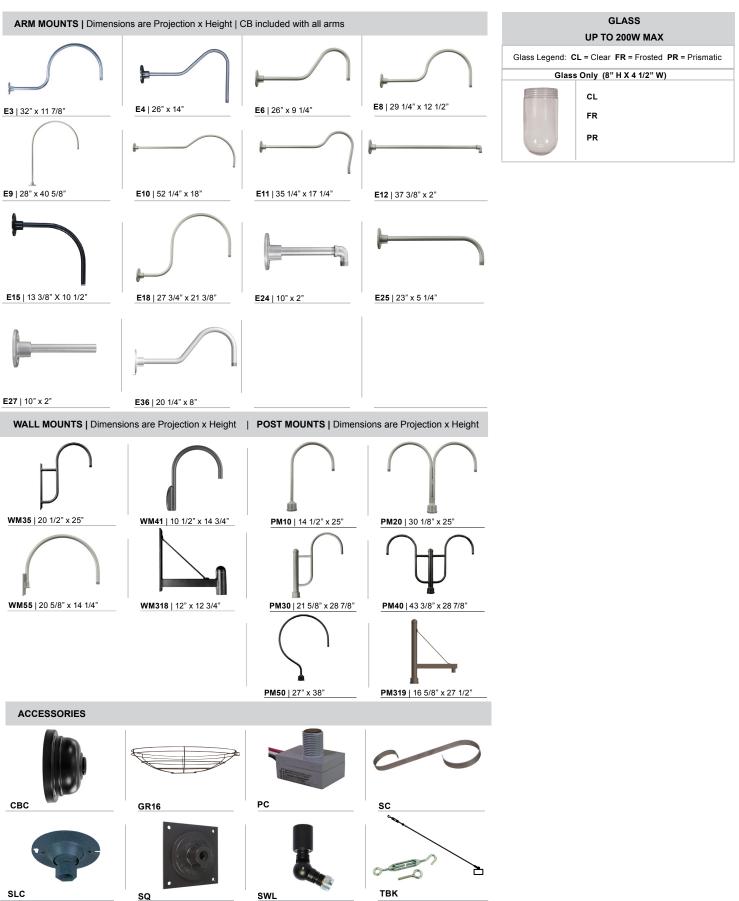

© 2020 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

ANPLighting **Specifications ORB216** Project: Quantity: Fixture Type: Customer: _ All fabric Color Cords are three conductor, 1/4" diameter Solid Fabric Colored Cords BLSF | Black GYSF | Gray CHSF | Chocolate Brown WHSF | White CASF | Cardinal ORSF | Orange LGSF | Lime Green KGSF | Kelly Green CBSF | Cobalt Blue SBSF | Sky Blue **Patterned Fabric Colored Cords** BWHPF | Black/White Houndstooth BIHPF | Brown/Ivory Houndstooth GYCPF | Gray/Citrus Yellow MOSPF | Magenta/Orange Stripe NMTPF | Navy Mini Tweed **Glossy Fabric Colored Cords** GMGF | Gun Metal SSGF | Sterling Silver CPGF | Copper Penny BRGF | Bronze GOGF | Gold

© 2020 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

1-800-548-3227 ANPlighting.com 08012019