			ect: pe:					
					Quantity.			
			ner:			6		
		Specifications						
	CHARMEN CHARMEN	Fitter: Fitter is durable 356 cast alur All hardware provided shall b steel or zinc plated steel.	ninum. e stainless	Electrical: Approximately 12" of pull wire extends Iuminaire. Additional pull wire provided post mount arms and wall mounts.		from 1 for		
36 3/4		stipple. Fixture Mounting:	Acorn Globes available in clear stipple or white stipple. Fixture Mounting:		Finish: A polyester powder coat high quality finish electro-statically applied and baked at 430 for exceptional durability and color retention Products undergo an intensive five-step			
a second		Post Mount: Post Cap with set screws. Fits 3" and 4" poles.			cleansing and pretreatment process for maximum paint adhesion.			
		Drivers: Universal voltage 120-277 is stand dimming is standard for LED platfor		dard. 0-10V humidity and orms. withstands u spray, come		e finish provides superior salt, I UV protection. This coating Ip to 3000 hours of continuous s with a 5-year warranty and is		
		See page 2 table for LED engine and driver specs, voltage and dimming protocols.			available in either a textured or gloss surfa Modifications: Consult factory for custom or modified des			
We	ight: 20 lbs	Catalog Logic						
.F0135	•	LF0135, 12, CL, P078LD	4D T5 40K	- <u>PC</u>	- FIN02 - W	M2141	Ē	
ED		Luminaire Cage Lens Light Sour Series & Wattag		Accessori	es Finial M	ounting	Fi	
	l		6				_	
Catalog Number								
	1 2	3 4 5	6	7	8		9	
LF0135		_	_	—		_		
			_					
OPTIONAL CAGES	6	ACCESSORIES	8	MOUI	NTING SOURC	E		
See Page 3 for Style/Design	HSS90	(90° House Side Shield, polished)	Post Mr	ount Arms	Wall	Mount Arms	s	
1, 12, 13, 14, 15						A for Style	~/9	
1, 12, 13, 14, 13	HSS120	(120° House Side Shield, polished)	*See Page 4	for Style/	Size *See Pag	e 4 for Style WM85		
	PHSS90	(90° House Side/Uplight Shield, polishe	*See Page 4 d) PA5151 PA5171	for Style/ PA8711	Size *See Page WM2141	WM8	58′	
1, 22, 23, 24, 25	PHSS90 PHSS120	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polish	*See Page 4 d) PA5151 PA5171	for Style/	Size *See Page WM2141	•	58′	
1, 22, 23, 24, 25 1, 32, 33, 34, 35	PHSS90 PHSS120	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with	*See Page 4 d) PA5151 ed) PA5171 PA5411	for Style/ PA8711	Size *See Page WM2141 WM2211	WM8	58′	
11, 22, 23, 24, 25 11, 32, 33, 34, 35 11, 42, 43, 44, 45	PHSS90 PHSS120 *EMG-LE	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)	*See Page 4 d) PA5151 ed) PA5171 PA5411	for Style/ PA8711	Size *See Pag WM2141 WM2211 WM3351	WM8	58′	
1, 22, 23, 24, 25 1, 32, 33, 34, 35 1, 42, 43, 44, 45 LENS	PHSS90 PHSS120	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)	*See Page 4 PA5151 ed) PA5171 PA5411 PA5621	for Style/ PA8711	Size *See Pag WM2141 WM2211 WM3351 WM4511	WM8	58 <sup>.</sup>	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         LENS         CL (Clear Stipple Polycarbonate)	PHSS90 PHSS120 *EMG-LE	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15° - 30° Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell;	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651	for Style/ PA8711	Size         *See Pag           WM2141         WM2211           WM3351         WM4511           WM5131         WM5131	WM8	58′	
1, 22, 23, 24, 25 1, 32, 33, 34, 35 1, 42, 43, 44, 45 LENS LC (Clear Stipple Polycarbonate)	PHSS90 PHSS120 *EMG-LE	<ul> <li>(90° House Side/Uplight Shield, polishe</li> <li>(120° House Side/Uplight Shield, polishe</li> <li>(120° House Side/Uplight Shield, polishe</li> <li>D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)</li> <li>-06 (High-Low Motion Sensor/Photocell; 15 - 30' Sensor Mounting Height)</li> <li>-10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height)</li> </ul>	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211	for Style/ PA8711	Size         *See Pag           WM2141         WM2211           WM3351         WM4511           WM5131         WM5161	WM8	58 <sup>.</sup>	
1, 22, 23, 24, 25 1, 32, 33, 34, 35 1, 42, 43, 44, 45 LENS L (Clear Stipple Polycarbonate) VH (White Stipple Polycarbonate)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15° - 30° Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell;	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA7911	for Style/ PA8711	Size         *See Pag           WM2141         WM2211           WM3351         WM4511           WM5131         WM5161           WM5311         WM5311	WM8	58 <sup>.</sup>	
1, 22, 23, 24, 25 1, 32, 33, 34, 35 1, 42, 43, 44, 45 LENS L (Clear Stipple Polycarbonate) WH (White Stipple Polycarbonate) LIGHT SOURCE & WATTAGE	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC	<ul> <li>(90° House Side/Uplight Shield, polishe</li> <li>(120° House Side/Uplight Shield, polishe</li> <li>(120° House Side/Uplight Shield, polishe</li> <li>D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)</li> <li>-06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height)</li> <li>-10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height)</li> <li>(Button Photo Cell)</li> </ul>	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA7911 PA8031	for Style/ PA8711	Size         *See Pag           WM2141         WM2211           WM3351         WM3351           WM4511         WM5131           WM5131         WM5131           WM55311         WM5501           WM5501         WM5501	WM8	58 <sup>.</sup>	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         3       LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA7911 PA8031 PA8521 PA8571 Column	for Style/ PA8711 PA8831	Size         *See Pag           WM2141         WM2211           WM3351         WM4211           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM501         WM5601           WM7411         WM8011	WM8	58 <sup>.</sup>	
1, 22, 23, 24, 25         1, 32, 33, 34, 35         1, 42, 43, 44, 45         LENS         L(Clear Stipple Polycarbonate)         VH (White Stipple Polycarbonate)         S         LIGHT SOURCE & WATTAGI         V029LD4D (29w Platform; 400ma Driver)         V046LD4D (46w Platform; 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC BES RNR SP TLPC	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15° - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell)	*See Page 4 () () () () () () () () () () () () ()	for Style/ PA8711 PA8831 PA8831 n Mount for Style/	Size         *See Pag           WM2141         WM2211           WM3351         WM4211           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM501         WM5601           WM7411         WM8011	WM8	58 <sup>.</sup>	
1, 22, 23, 24, 25         1, 32, 33, 34, 35         1, 42, 43, 44, 45         LENS         L(Clear Stipple Polycarbonate)         VH (White Stipple Polycarbonate)         LIGHT SOURCE & WATTAGI         1029LD4D       (29w Platform; 400ma Driver)         1046LD4D       (46w Platform; 400ma Driver)         1078LD4D       (78w Platform; 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 5'-30° Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8'-15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle)	*See Page 4 () () () () () () () () () () () () ()	for Style/ PA8711 PA8831	Size         *See Pag           WM2141         WM2211           WM3351         WM4211           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM5131         WM5131           WM501         WM5601           WM7411         WM8011	WM8	58′	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         LENS         LENS         LIGHT SOURCE & WATTAGI         V029LD4D       (29w Platform; 400ma Driver)         P046LD4D       (46w Platform; 400ma Driver)         P078LD4D       (78w Platform; 400ma Driver)	ES ES HLMSPC HLMSPC HLMSPC FC RNR SP TLPC TL5 TL5 TL7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle)	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA8031 PA8031 PA8521 PA8571 Column *See Page 4 CM Column 9	for Style/ PA8711 PA8831 PA8831 n Mount for Style/ n Mount	Size *See Pag WM2141 WM2211 WM3351 WM4511 WM5131 WM5161 WM5601 WM5601 WM7411 Size FINISHES	WM88	58′	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         2       LENS         2       LENS         2       LENS         2       LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2017LD4D       (117w Platform, 400ma Driver)	ES ES HLMSPC HLMSPC HLMSPC FC RNR SP TLPC TL5 TL5 TL7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 5'-30° Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8'-15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle)	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA8031 PA8031 PA8521 PA8571 Column *See Page 4 CM Column 9	n Mount for Style/2 n Mount for Style/2 n Mount	Size *See Pag WM2141 WM2211 WM3351 WM4511 WM5131 WM5161 WM5161 WM5601 WM7411 WM8011 Size FINISHES	WM88 WM88	581	
1, 22, 23, 24, 25         1, 32, 33, 34, 35         1, 42, 43, 44, 45         LENS         L(Clear Stipple Polycarbonate)         VH (White Stipple Polycarbonate)         LIGHT SOURCE & WATTAGI         1029LD4D       (29w Platform; 400ma Driver)         1046LD4D       (46w Platform; 400ma Driver)         1078LD4D       (78w Platform; 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL7 *For En Resource	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15° - 30° Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8° - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) hergency, lumen output data, see	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA8031 PA8031 PA8521 PA8571 Column *See Page 4 CM Column 9 Page 4 CM Column	n Mount for Style/: PA8711 PA8831	Size         *See Pag           WM2141         WM2141           WM2211         WM3251           WM3511         WM5131           WM5131         WM5131           WM5501         WM5601           WM8011         Size           FINISHES         FINISHES and Finish have addled for the finis	WM88 WM88 tional charges Standard Grade	581	
21, 22, 23, 24, 25         31, 32, 33, 34, 35         32, 33, 34, 35         32, 33, 34, 35         34, 42, 43, 44, 45         35         41, 42, 43, 44, 45         36         LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2017LD4D       (117w Platform, 400ma Driver)	ES ES HLMSPC HLMSPC HLMSPC FC RNR SP TLPC TL5 TL5 TL7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15 - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) hergency lumen output data, see section at www.ANPflighting.com.	*See Page 4 PA5151 PA5151 PA5171 PA5621 PA5651 PA6211 PA6211 PA7911 PA8031 PA8521 PA8521 PA8571 Column *See Page 4 CM Column and	n Mount for Style/: PA8711 PA8831 PA8831 n Mount n Mount n Mount	Size         *See Pag           WM2141         WM2141           WM2211         WM3251           WM45131         WM5131           WM5131         WM5131           WM5501         WM5601           WM5601         WM5601           WM8011         WM8011           Size         Size           Size         State           10M         Architectural Brog           11M         Patina Verde	tional charges Standard Ize 51 52	581	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         2       LENS         2       LENS         2       LENS         2       LENS         2       LIGHT SOURCE & WATTAGE         3       LIGHT SOURCE & WATTAGE         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2017LD4D       (117w Platform, 400ma Driver)         217LD4D       DPTICS         72 (Type II)       T2 (Type II)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL7 *For En Resource 7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) mergency lumen output data, see Section at www.ANPlighting.com.	*See Page 4 PA5151 PA5171 PA5411 PA5621 PA5651 PA6211 PA6211 PA7911 PA8031 PA8521 PA8571 Column *See Page 4 CM Column subset Column and CM Col	n Mount for Style/2 PA8711 PA8831 PA8831 n Mount num and Marri Bendrd Orde 10	Size         *See Pag           WM2141         WM2141           WM2211         WM3351           WM4511         WM5131           WM5131         WM5131           WM5501         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM501         WM501	tional charges Standard Grade 122 51	581	
1, 22, 23, 24, 25         1, 32, 33, 34, 35         1, 42, 43, 44, 45         LENS         L(Clear Stipple Polycarbonate)         VH (White Stipple Polycarbonate)         LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2078LD4D       (117w Platform, 400ma Driver)         2078LD4D       (217w Platform, 400ma Driver)         2078LD4D       (117w Platform, 400ma Driver)         2078LD4D       (117w Platform, 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL7 *For En Resource 7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15 - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) hergency lumen output data, see section at www.ANPflighting.com.	*See Page 4 PA5151 PA5151 PA5171 PA5621 PA5651 PA6211 PA6211 PA7911 PA8031 PA8521 PA8521 PA8571 Column *See Page 4 CM Column and	n Mount for Style/: PA8711 PA8831 n Mount n Mount n Mount n Mount	Size         *See Pag           WM2141         WM2141           WM2211         WM3351           WM5131         WM5131           WM55311         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM5601         WM5601           WM6011         WM5601           WM6011         WM6011           Size         StateCase           IMM         StateCase           100         Architectural Brow           110         Patina Verde           12M         Copper Clay	tional charges Standard Stand	581	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         2       LENS         2       LENS         2       LENS         2       LENS         2       LIGHT SOURCE & WATTAGE         3       LIGHT SOURCE & WATTAGE         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2017LD4D       (117w Platform, 400ma Driver)         217LD4D       DPTICS         72 (Type II)       T2 (Type II)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL7 TL5 TL7 For En Resource 7	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) mergency lumen output data, see Section at www.ANPlighting.com.	*See Page 4 A A A B A B A B A B A B A B A B A B A	for Style/:           PA8711           PA8831           PA8831           In Mount           for Style/:           In Mount           for Style/:           In Mount           Standard           In Mount           In In Mount           In In In Mount           In I	Size *See Pag WM2141 WM2211 WM3351 WM5131 WM5131 WM5131 WM5531 WM5601 WM5601 WM7411 WM8011 Size Size Size Size Size Size Size Size	tional charges Student of Grade tize 51 52 53 56 61 70	581	
1, 22, 23, 24, 25 1, 32, 33, 34, 35 1, 42, 43, 44, 45 LENS LENS LIGHT SOURCE & WATTAGE 029LD4D (29w Platform; 400ma Driver) 046LD4D (46w Platform; 400ma Driver) 117LD4D (117w Platform; 400ma Driver) 117LD4D (117w Platform, 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 () () () () () () () () () () () () ()	n Mount for Style/: PA8711 PA8831 PA8831	Size *See Pag WM2141 WM3251 WM3351 WM4511 WM5131 WM5131 WM5131 WM5161 WM5161 WM7411	tional charges lize 51 52 53 56 61 70 71	58 <sup>-</sup>	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         2       LENS         2       LENS         3       LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2017LD4D       (117w Platform, 400ma Driver)         217LD4D       T2 (Type II)         T3 (Type III)       T3 (Type III)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 A A A B A B A B A B A B A B A B A B A	for Style/:           PA8711           PA8831           PA8831           In Mount           for Style/:           In Mount           for Style/:           In Mount           Standard           In Mount           In In Mount           In In In Mount           In I	Size *See Pag WM2141 WM2211 WM3351 WM5131 WM5131 WM5131 WM5531 WM5601 WM5601 WM7411 WM8011 Size Size Size Size Size Size Size Size	tional charges Student of Grade tize 51 52 53 56 61 70	58 <sup>-</sup>	
21, 22, 23, 24, 25         31, 32, 33, 34, 35         41, 42, 43, 44, 45         22       LENS         23       LIGHT SOURCE & WATTAGI         24       Claw Platform; 400ma Driver)         27       Claw Platform; 400ma Driver)         29       Claw Platform; 400ma Driver)         2029LD4D       (29w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2078LD4D       (117w Platform, 400ma Driver)         217LD4D       (117w Platform, 400ma Driver)         217LD4D       (117w Platform, 400ma Driver)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 c) PA5151 PA5171 PA5621 PA5621 PA5651 PA6211 PA7911 PA8031 PA8521 PA8521 PA8571 Colum *See Page 4 CM Colum Sudde Colum Sudde Colum Colum Sudde Colum Colum Sudde Colum C	n Mount for Style/: PA8711 PA8831 PA8831	Size *See Pag WM2141 WM2211 WM3351 WM4511 WM5131 WM5131 WM5131 WM5601 WM5601 WM5601 WM5601 WM5601 WM6011 WM8011	tional charges Standard rize 51 56 56 61 70 71 71 72 73	58 <sup>-</sup>	
11, 22, 23, 24, 25         11, 32, 33, 34, 35         11, 42, 43, 44, 45         2       LENS         2       LENS         2       LENS         3       LIGHT SOURCE & WATTAGI         14, 42, 43, 44, 45       100 ma Driver)         3       LIGHT SOURCE & WATTAGI         10       (29w Platform; 400ma Driver)         10       (46w Platform; 400ma Driver)         117LD4D       (117w Platform; 400ma Driver)         117LD4D       (117w Platform, 400ma Driver)         117LD4D       T2 (Type II)         117 T3 (Type III)       T5 (Type V)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 A A A B A B A B A B A B A B A B A B A	for Style/:           PA8711           PA8831           PA8831           Image: Style and	Size *See Pag WM2141 WM2211 WM3351 WM4511 WM5131 WM5131 WM5131 WM5131 WM5161 WM7411	tional charges Stindal charges Ize 51 52 53 66 61 70 71 70 71 72	581	
21, 22, 23, 24, 25         31, 32, 33, 34, 35         32, 33, 34, 35         32, 44, 45         32         24, 25, 24, 25         25, 20, 23, 33, 34, 35         34, 44, 45         35, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 PA5151 PA5151 PA5411 PA5621 PA5651 PA6211 PA7911 PA8031 PA8031 PA8521 PA8521 PA8571 Column *See Page 4 CM Column *See Pa	for Style/:           PA8711           PA8831           Image: Style and St	Size *See Pag Waltat WM2141 WM3251 WM3551 WM5131 WM5131 WM5131 WM5501 WM5601	tional charges Standard nze 51 52 53 56 61 70 71 71 71 71 73 107 73	581	
21, 22, 23, 24, 25         31, 32, 33, 34, 35         31, 42, 43, 44, 45         2       LENS         2       LENS         2L (Clear Stipple Polycarbonate)         WH (White Stipple Polycarbonate)         3       LIGHT SOURCE & WATTAGI         2029LD4D       (29w Platform; 400ma Driver)         2046LD4D       (46w Platform; 400ma Driver)         2078LD4D       (78w Platform; 400ma Driver)         2078LD4D       (117w Platform, 400ma Driver)         217LD4D       (117w Platform, 400ma Driver)         217LD4D       T2 (Type II)         T3 (Type III)       T5 (Type V)         5       COLOR TEMPERATURE (CC         27K (2700K)       30K (3000K)	PHSS90 PHSS120 *EMG-LE HLMSPC HLMSPC PC RNR SP TLPC TL5 TL5 TL5 TL7 *For En Resource FIN18, FI FIN18, FI FIN18, FI	(90° House Side/Uplight Shield, polishe (120° House Side/Uplight Shield, polishe D20HV (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less) -06 (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height) -10 (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height) (Button Photo Cell) (Reinforcing Neck Ring) (Surge Protector, 10kA & 10kV) (Twist Lock photo cell, includes receptacle & photo cell) (5-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) (7-pin Twist Lock receptacle) DPTIONAL FINIALS See Page 3 for Style/Size N04, FIN05, FIN06, FIN10, FIN12, FIN15,	*See Page 4 PA5151 PA5171 PA5621 PA5651 PA5651 PA6211 PA7911 PA8031 PA8031 PA8031 PA8521 PA8521 PA8571 Column *See Page 4 CM Column	for Style/:           PA8711           PA8831           Im Mount           for Style/:           n Mount           for Style/:           n Mount           for Style/:           n Mount           order           10           11           2           40           41           42           43           44           43           44           43           44           45           46	Size *See Pag Waltan WM2141 WM3211 WM3351 WM4511 WM5131 WM5131 WM5131 WM5601 WM5601 WM7411 WM801 WM8011 WM8011 WM80	tional charges Bandard Izee 51 52 53 56 61 70 71 71 72 73 tural 76 77	581 831	

Project: \_

Customer:

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_

#### LED PERFORMANCE

PLATFORM							
LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy			
29W	2700K	2670	30w	89			
	3000K	2670	30w	89			
	3500K	3209	30w	107			
	4000K	3465	30w	116			
46W	2700K	4004	46w	87			
	3000K	4004	46w	87			
	3500K	4814	46w	105			
	4000K	5197	46w	115			
78W	2700K	7041	80w	88			
	3000K	7041	80w	88			
	3500K	8464	80w	106			
	4000K	9138	80w	114			
117W	2700K	10561	120w	88			
	3000K	10561	120w	88			
	3500K	12696	120w	106			
	4000K	13707	120w	114			

#### **PLATFORM SPECIFICATION:**

- · Efficacy ranges from 87-116 lumens per watt
- Customized lens precisely directs the light
- Operating temperature of -30C to 55C
- Life: L70 is 60,000 hours
- PLATFORM CCT: 2700K, 3000K, 3500K, and 4000K
- CRI: >70
- . Parallel circuitry ensures consistent light output in the event of single LED failure

#### PLATFORM DRIVER SPECIFICATION:

- Operates at 400mA
- Dimmable down to 10%
- · Built in surge protection
- Constant current output 50/60HZ
- Driver Efficiency > 90% power factor above 99%
- 120 277 volts
- 0-10V dimming protocol is standard

#### **PLATFORM LISTINGS**

- · Fully compliant with the RoHS Directive
- Certifications: ETL
- · Rated IP65 with an optional IP66 rating


#### WARRANTY

See www.ANPlighting.com for complete fixture warranty.

• 7 year limited warranty\* on Platform LED engines

• 5 year limited warranty\* on Platform Drivers

\*Limited Warranty: A typical year is defined as 4380 hours of operation. Failure defined as more than 10% of the total platform LED's not operating





HSS90 & HSS120







TL5 & TL7



EMG-LED 20HV



HLMSPC-06 & HLMSPC-10




РС





RNR

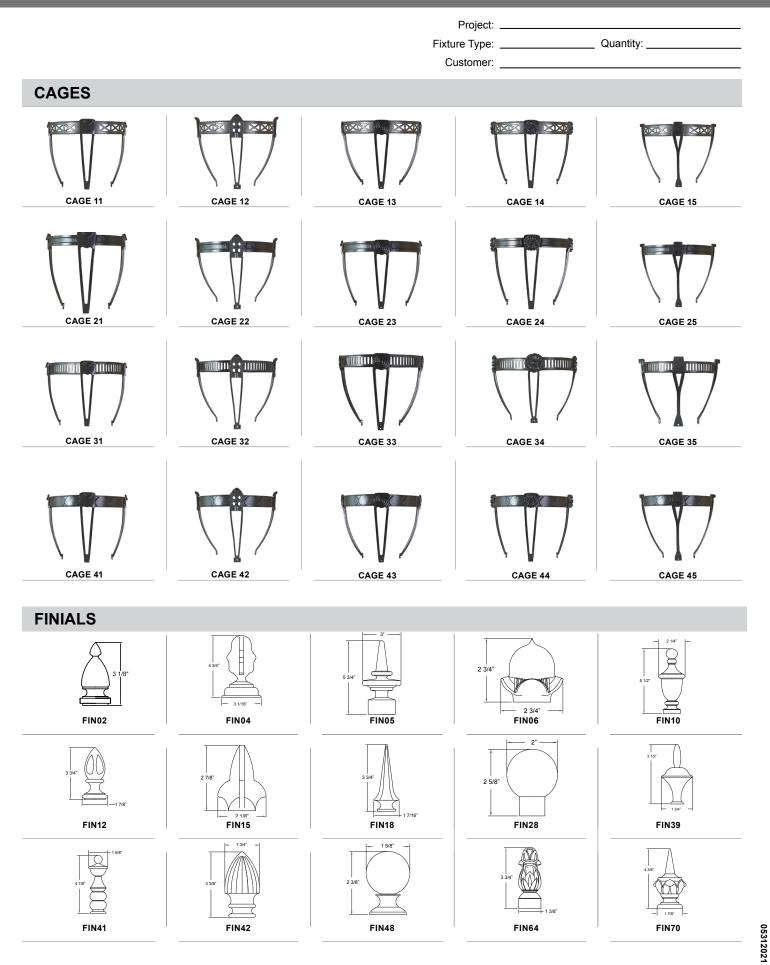


© 2021 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

### 1-800-548-3227 ANPlighting.com

Project: \_\_\_\_\_

Customer:

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

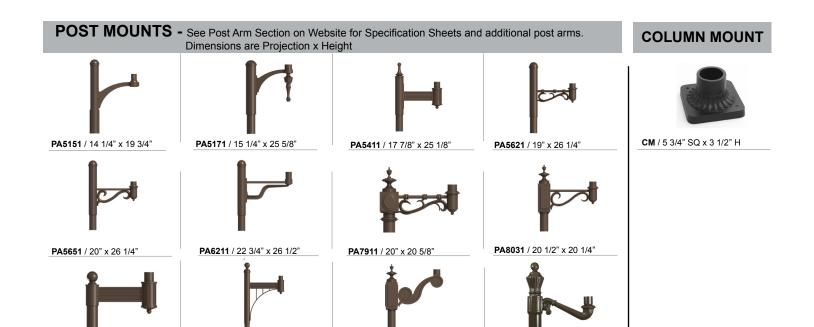

PA8711 / 20" x 20 3/8"

WALL MOUNTS - See Wall Mount Section on Website for Specification Sheets and additional wall mount arms. Dimensions are Projection x Height.



PA8521 / 18 1/4" x 14 1/2"

WM2141 /18" x 12 3/16"



WM5311 / 10 7/8" x 9 3/4"



WM5601 / 17 7/8" x 14"

PA8571 / 24" x 47"





WM7411 / 14" x 15 3/4"

WM4511 / 17" x 8"







PA8831 / 18 7/8" x 18 7/8"



WM5161 / 15 3/4" x 17 3/4"



WM8831 / 17 1/4" x 16 3/8"