
# Specifications CB0501



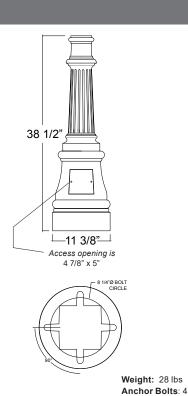

Project: Fixture Type: Quantity: \_ Customer:

## Specifications

All parts are durable 356 cast aluminum and high strength extruded aluminum.

Shafts are available in 3", and 4" diameter and wall thickness of .125 or .188.

All hardware provided shall be stainless steel or zinc plated steel.

Standard anchor bolts provided are 3/4" x 18" x 3". Bolts, nuts and washers shall be hot dipped galvanized steel .

Bolt pattern diameter is 8 1/4".

Access
Hand access opening and cover are provided in cast base. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). See drawing for position

5 3/4" bottom hole provided for conduit



**Illuminating** 

# Grounding

All cast bases are provided with an All cast bases are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine

## Pole Height

Maximum pole height is 14 feet.

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss

**Modifications:**Consult factory for custom or modified designs.

## Catalog Logic

CB0501 Cast Base

**4S14.188** Shaft

GFI20

72 Finish

Catalog Number

**CB0501** 

2 3 1

## Additional heights and pole diameters may be available. Contact factory for your specific needs.

1 Smooth Shaft Catalog No.	1 Fluted Shaft Catalog No.	Shaft Diameter	Finished Height	Wall Thickness
3S8.125	3F8.125	3"	8'	.125
3S9.125	3F9.125	3"	9'	.125
3S10.125	3F10.125	3"	10'	.125
-	-	-	-	-
3S10.188	3F10.188	3"	10'	.188
3S11.188	3F11.188	3"	11'	.188
3S12.188	3F12.188	3"	12'	.188
-	-	-	-	-
4S8.125	-	4"	8'	.125
4S9.125	-	4"	9'	.125
4S10.125	-	4"	10'	.125
4S11.125	-	4"	11'	.125
4S12.125	-	4"	12'	.125
•	-	-	-	-
-	4F8.188	4"	8'	.188
-	4F9.188	4"	9'	.188
-	4F10.188	4"	10'	.188
-	4F11.188	4"	11'	.188
4S12.188	4F12.188	4"	12'	.188
4S13.188	4F13.188	4"	13'	.188
4S14.188	4F14.188	4"	14'	.188

2 ACCESSORIES				
GFI15	(15 amp GFCI receptacle outlet)			
GFI20	(20 amp GFCI receptacle outlet)			
GFI-WPU	(20 amp GFCI receptacle with weather proof in-use cover)	<b>W</b>		
BAA	(Cast Banner Arm A for 24" wide banner)	¢0000000000000000000000000000000000000		
BAB	(Cast Banner Arm B for 30" wide banner)	(‡)		
BAC	(Cast Banner Arm C for 30" wide banner)			
LR1	(Cast Ladder Rest 1)			
LR3	(Cast Ladder Rest 3)			
LR4	(Cast Ladder Rest 4)			
LR5	(Cast Ladder Rest 5)			
SIGN A	(Cast Sign A; 30" x 9", 8 letters/numbers on o requires Banner Arm to hang)	ne line;		
SIGN B	(Cast Sign B; 31" x 7", 12 letters/numbers o Banner Arm to hang)	n one line; requires  YOUR SIGN		
SIGN C line, requires	(Cast Sign C; 27" x 11", two rows of 8 letter Banner Arm to hang)	s/numbers on each  YOUR SIGN		
SIGN D	(Cast Sign D; 11" x 6 1/2", 4 letters/number	L		
SIGN E numbers on o	(Cast Sign E; comes with pole clamp, 24 1/2 one line)	2" x 6", 9 letters/		
FPH1	(Flag Pole Holder)			
TP	(Tamper Proof Screws)			



# Specifications CB0501

Project:		
Fixture Type:	Quantity: _	
Customer:		
	Made in USA	Illuminating ENGINEERING SOCIETY

3 FINISHES						
Standard Grade	Marine Grade		Standard Grade	Marine Grade	-	
40	NA	Raw Unfinished	53	100	Copper Clay	
41	101	Black	56	109	Silver	
42	102	Forest Green	61	106	Black Verde	
43	114	Bright Red	70	118	Painted Chrome	
44	107	White	71	105	Painted Copper	
45	112	Bright Blue	72	108	Textured Black	
46	123	Sunny Yellow	73	125	Matte Black	
47	120	Aqua Green	76	121	Textured Architectural Bronze	
49	NA	Galvanized	77	127	Textured White	
50	111	Navy	78	124	Textured Silver	
51	103	Architectural Bronze	10	130	Aspen Green	
52	104	Patina Verde	11	131	Cantaloupe	
12	133	Lilac	13	132	Putty	
Consu	ılt factor	y for additional pa	int charges	and a	/ailability	